

EcoLine Office 1200 3060lm 3000K Ra>80 On/Off

Article code: 8246090112
 EAN: 5703821175081
 Replaces: 212040



Electrical

System wattage: 23W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51
 Leakage current (mA): 0.55

Light technic

Type of light source: LED
 Luminous flux: 3060lm
 Efficacy: 133 lm/W
 Colour temperature: 3000K
 Colour rendering (Ra): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L80/B10>50,000
 Light distribution: Direct
 Optic: Double parabolic louvre, satin matt
 UGR: UGR<19

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class I
 IP Class: IP20

Energy and approvals

Contains light source of energy class: C
 Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Sheet steel
 Optics: Aluminium

Mounting/Connection



Mounting: Suspended or surface, Indoor
 Module: 1200
 Connection: Screwless terminal block

Dimensions

Length (mm) L: 1200
 Width (mm) W: 142
 Height (mm) H: 63
 Weight (kg) gross/net: 5.7 / 5.5

Packaging

Packing dimensions (mm): 1215 x 146 x 68

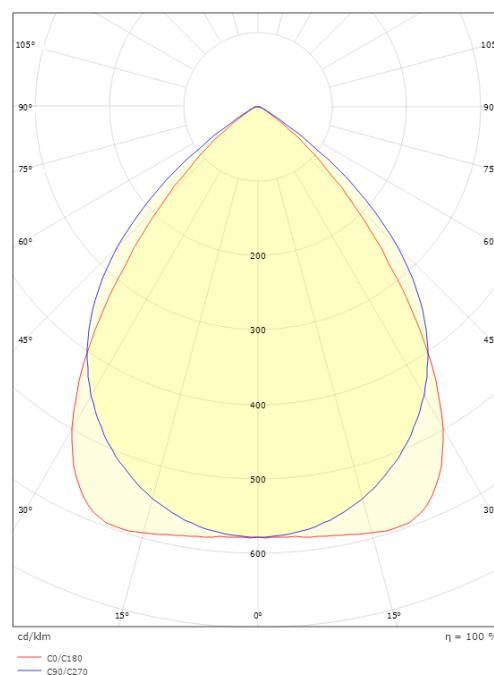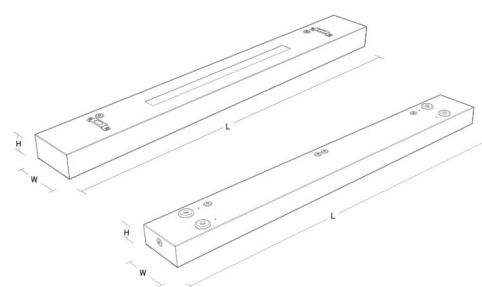

5 7 0 3 8 2 1 1 7 5 0 8 1