

EcoLine Office 1200 White 3060lm 3000K Ra>80 DALI-2 / Push Dim

Article code: 8246090135
EAN: 5703821175104

• = This article is produced by order, with an expected delivery time of 3-4 weeks.



Electrical

System wattage: 23W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 13, B16: 20, C10: 21, C16: 34
Leakage current (mA): 0,07

Light technic

Type of light source: LED
Luminous flux: 3060lm
Efficacy: 133 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B10>50,000
Light distribution: Direct
Optic: Double parabolic louvre, satin matt
UGR: UGR<19
Visible flicker (PstLM): 0,03
Stroboscopic flicker (SVM): 0

Control/Dimming

Type: DALI-2 / Push Dim

Protection

Luminaire class: Class I
IP Class: IP20

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Sheet steel
Colour: White (Pure white, 25% gloss)
Optics: Aluminium

Mounting/Connection



Mounting: Suspended or surface, Indoor
Module: 1200
Connection: Screwless terminal block

Dimensions

Length (mm) L: 1200
Width (mm) W: 142
Height (mm) H: 63
Weight (kg) gross/net: 5.7 / 5.5

Packaging

Packing dimensions (mm): 1215 x 146 x 68

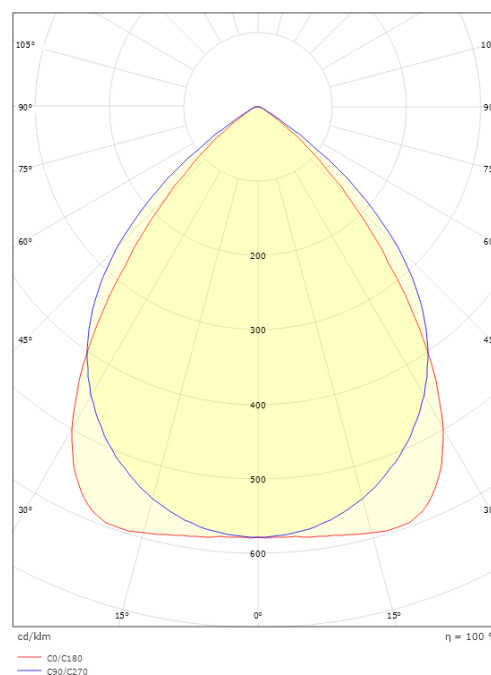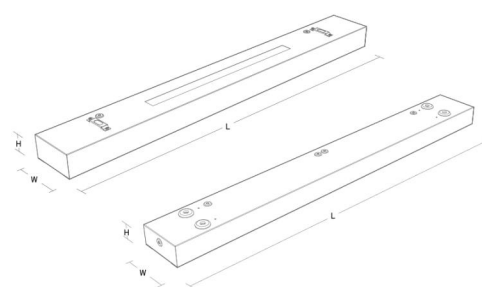

5 7 0 3 8 2 1 1 7 5 1 0 4