

Facet White 5250lm 4000K Ra>80 Dim (down) 1x pull switch sensor (up/down)

Article code: 8246090342
EAN: 5703821169424



Electrical

System wattage: 35W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51
Leakage current (mA): 0.85

Light technic

Type of light source: LED
Luminous flux: 5250lm
Efficacy: 150 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B10>100,000
Lifetime: L94>50,000
Light distribution: Direct/Indirect 50/50%
Optic: Lens C, prismatic Conical
UGR: UGR<19
Photobiological safety: RG 1

Control/Dimming

Type: Dim (down) 1x pull switch sensor (up/down)

Protection

Luminaire class: Class I
IP Class: IP20

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Sheet steel
Colour: White (RAL 9010, 20% gloss)
Optics: Acrylic (PMMA)

Mounting/Connection


Mounting: Suspended, Indoor
Wire set: 2x2m wire kit w/loop M4
Cable: Cable 3x0,75mm² 2,5m w/ Schuko white

Dimensions

Length (mm) L: 1514
Width (mm) W: 64
Height (mm) H: 80
Weight (kg) gross/net: 6.5 / 6.3

Packaging

Packing dimensions (mm): 1565 x 66 x 90

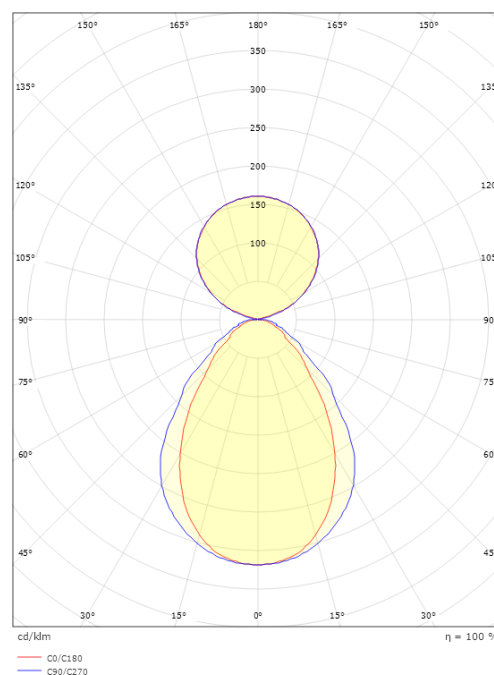

5 7 0 3 8 2 1 1 6 9 4 2 4