

EcoLine Office 1200 White 4350lm 3000K Ra>80 DALI-2 / Push Dim

Article code: 8246090504
EAN: 5703821172400

• = This article is produced by order, with an expected delivery time of 3-4 weeks.



Electrical

System wattage: 30W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 13, B16: 20, C10: 21, C16: 34
Leakage current (mA): 0,07

Light technic

Type of light source: LED
Luminous flux: 4350lm
Efficacy: 145 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B10>50,000
Light distribution: Direct/Indirect 60/40%
Optic: Double parabolic louvre, satin matt
UGR: UGR<16
Visible flicker (PstLM): 0,02
Stroboscopic flicker (SVM): 0

Control/Dimming

Type: DALI-2 / Push Dim

Protection

Luminaire class: Class I
IP Class: IP20

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Sheet steel
Colour: White (Pure white, 25% gloss)
Optics: Aluminium

Mounting/Connection



Mounting: Suspended, Indoor
Module: 1200
Wire set: 2x2m wire kit w/loop M13 w/2 brackets
Cable: Cable 5x0,75mm² 2,5m white
Connection: Screwless terminal block

Dimensions

Length (mm) L: 1200
Width (mm) W: 142
Height (mm) H: 81
Weight (kg) gross/net: 6.2 / 6

Packaging

Packing dimensions (mm): 1255 x 146 x 95

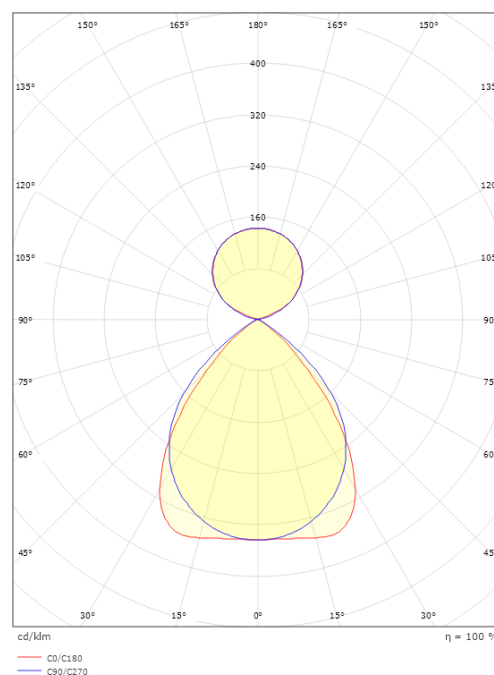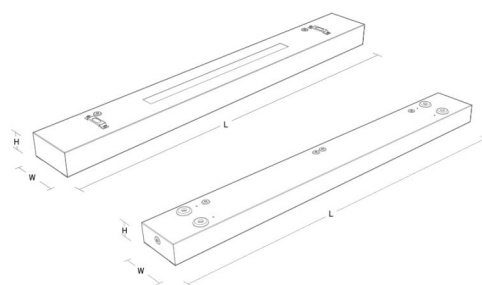

5 7 0 3 8 2 1 1 7 2 4 0 0