

## EcoLine Office 1500 4920lm 3000K Ra>80 DALI-2

Article code: 8246090588  
 EAN: 5703821176118

• = This article is produced by order, with an expected delivery time of 3-4 weeks.



### Electrical

System wattage: 34W  
 Voltage: 220-240V  
 Max. luminaires per circuit breaker: B10: 13, B16: 24, C10: 21, C16: 38

### Light technic

Type of light source: LED  
 Luminous flux: 4920lm  
 Efficacy: 145 lm/W  
 Colour temperature: 3000K  
 Colour rendering (Ra): Ra>80  
 MacAdams factor: SDCM: 3  
 Lifetime: L80/B10>50,000  
 Light distribution: Direct/Indirect 65/35%  
 Optic: Double parabolic louvre, satin matt  
 UGR: UGR<16

### Control/Dimming

Type: DALI-2

### Protection

Luminaire class: Class I  
 IP Class: IP20

### Energy and approvals

Contains light source of energy class: C  
 Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Sheet steel  
 Colour: White (Pure white, 25% gloss)  
 Optics: Aluminium

### Mounting/Connection



Mounting: Suspended, Indoor  
 Module: 1500  
 Wire set: 2x2m wire kit w/loop M13 w/2 brackets  
 Connection: Screwless terminal block

### Dimensions

Length (mm) L: 1500  
 Width (mm) W: 142  
 Height (mm) H: 81  
 Weight (kg) gross/net: 8.2 / 8

### Packaging

Packing dimensions (mm): 1555 x 146 x 95

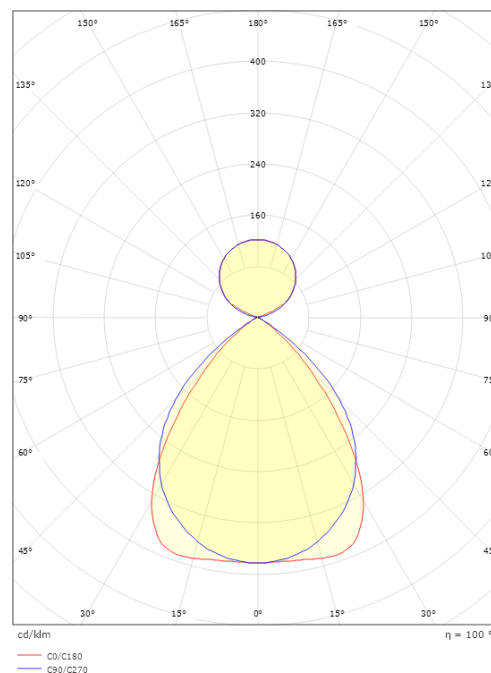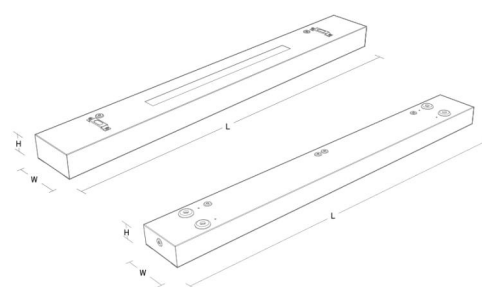

5 7 0 3 8 2 1 1 7 6 1 1 8