

## Arena 1200 White Narrow 23530lm 4000K Ra>80 DALI-2

Article code: 8246093912  
EAN: 5703821176385



• = This article is produced by order, with an expected delivery time of 3-4 weeks.



### Electrical

System wattage: 144W  
Voltage: 220-240V  
Max. luminaires per circuit breaker: B10: 9, B16: 14, C10: 11, C16: 17  
Leakage current (mA): 0,44

### Light technic

Type of light source: LED  
Light source included: Yes  
Luminous flux: 23530lm  
Efficacy: 163 lm/W  
Colour temperature: 4000K  
Colour rendering (Ra): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L90/B10>70,000  
Lifetime: L80/B20>100,000  
Minimum ambient temperature: -25°C  
Light distribution: Direct  
Optic: Lens Narrow  
Beam angle: Narrow  
UGR: UGR<19  
Visible flicker (PstLM): 0,03  
Stroboscopic flicker (SVM): 0

### Control/Dimming

Type: DALI-2

### Protection

Luminaire class: Class I  
IK Class: IK08  
IP Class: IP23

### Energy and approvals

Contains light source of energy class: C  
Breem: Fulfil Hea 01 for flicker free lighting

### Materials and finish

Housing: Sheet steel  
Colour: White (RAL 9010, 20% gloss)  
Optics: Acrylic (PMMA)

### Mounting/Connection



Mounting: Suspended or surface, Indoor  
Module: 1200  
Connection: 7-pole screwless terminal block with 5x2,5mm2 (+DALI) through wiring

### Dimensions

Length (mm) L: 1256  
Width (mm) W: 295  
Height (mm) H: 57  
Weight (kg) gross/net: 8.2 / 8

### Packaging

Packing dimensions (mm): 1285 x 300 x 65

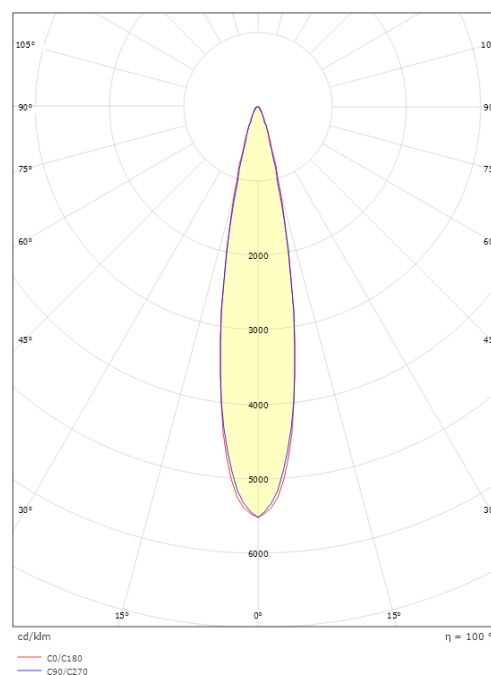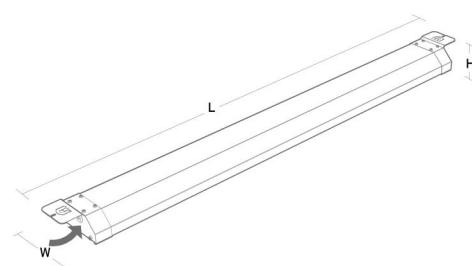

5 7 0 3 8 2 1 1 7 6 3 8 5