

Arena 1200 White Wide 23230lm 4000K Ra>80 DALI-2

Article code: 8246093938
EAN: 5703821176361



• = This article is produced by order, with an expected delivery time of 3-4 weeks.



Electrical

System wattage: 144W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 3, B16: 5, C10: 5, C16: 8
Leakage current (mA): 0,18

Light technic

Type of light source: LED
Light source included: Yes
Luminous flux: 23230lm
Efficacy: 161 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L90/B10>70,000
Lifetime: L80/B20>100,000
Minimum ambient temperature: -25°C
Light distribution: Direct
Optic: Lens Wide
Beam angle: Wide
UGR: UGR<25
Visible flicker (PstLM): 0,03
Stroboscopic flicker (SVM): 0
Photobiological safety: RG 1

Control/Dimming

Type: DALI-2

Protection

Luminaire class: Class I
IK Class: IK08
IP Class: IP23

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes

Materials and finish

Housing: Sheet steel
Colour: White (RAL 9010, 20% gloss)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Suspended or surface, Indoor
Module: 1200
Connection: 7-pole screwless terminal block with 5x2,5mm2 (+DALI) through wiring

Dimensions

Length (mm) L: 1256
Width (mm) W: 295
Height (mm) H: 57
Weight (kg) gross/net: 8.2 / 8

Packaging

Packing dimensions (mm): 1285 x 300 x 65

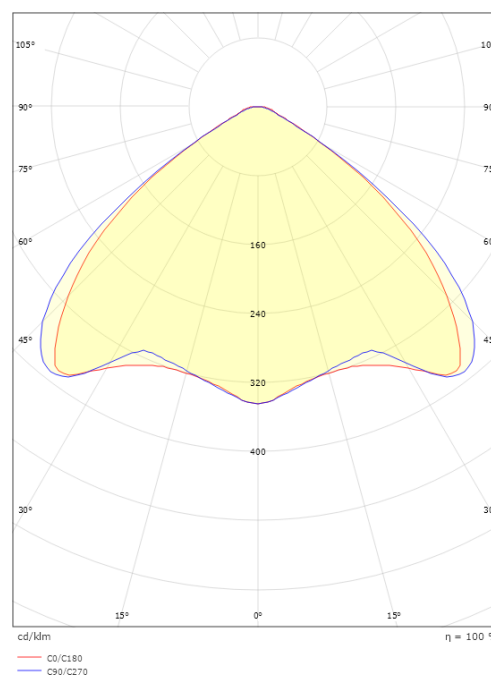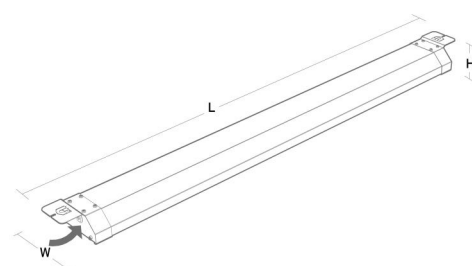

5 7 0 3 8 2 1 1 7 6 3 6 1