

CircLED Multi



CircLED Multi Grey Lens 3, Class II Top 5820lm 4000K Ra>70 On/Off

Article code: 8246094128
EAN: 5703821176903



Electrical

System wattage: 42W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 7, B16: 12, C10: 11, C16: 19

Light technic

Type of light source: LED
Luminous flux: 5820lm
Efficacy: 139 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>70
MacAdams factor: SDCM: 3
Lifetime: L80/B10>100,000
Light distribution: Multi Lens
Optic: Lens III
Visible flicker (PstLM): 0.1
Stroboscopic flicker (SVM): 0

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class II
IK Class: IK09
IP Class: IP66
Surge protection: Integrated (min. 4 kV)

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting
ULOR (Yes / Yes, up to 17° tilt angle

Materials and finish

Housing: Die-cast aluminium
Colour: Grey (structure 2150 sablé)
Optics: Tempered glass

Mounting/Connection

Mounting: Post - top (Ø60mm), Outdoor
Cable: Cable 2x1mm² 10m
Wind projected area: 0,0415m² - Max 6,2 kg

Dimensions



Length (mm) L: 460
Width (mm) W: 390
Height (mm) H: 185
Weight (kg) gross/net: 9.2 / 9

Packaging

Packing dimensions (mm): 460 x 390 x 185

Explanatory text

Class II

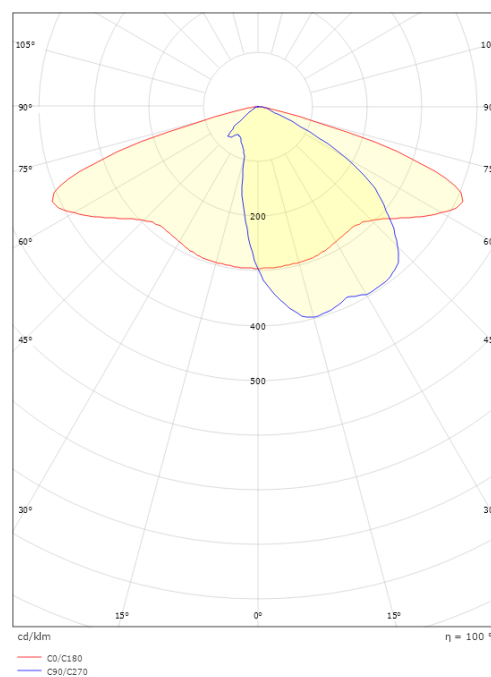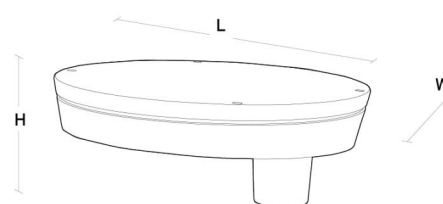

5 7 0 3 8 2 1 1 7 6 9 0 3