

# Junistar IsoSafe DimToWarm



## Emergencybox Driver DALI / EM Self test, DALI Emergency 3H

Article code: 8246094429  
EAN: 5703821177344



### Electrical

System wattage: 3W  
Voltage: 220-240V

### Control/Dimming

Type: DALI Emergency 3H

### Protection

IP Class: IP20

### Materials and finish

Housing: Polycarbonat (PC)

### Mounting/Connection


Mounting: Indoor

### Dimensions

Length (mm) L: 270  
Width (mm) W: 75  
Height (mm) H: 35  
Weight (kg) gross/net: 0.6 / 0.5

### Packaging

Packing dimensions (mm): 300 x 105 x 40

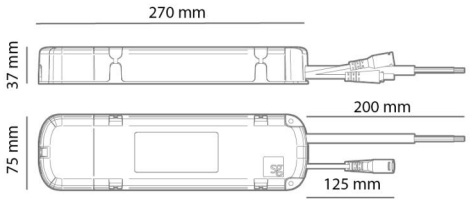

|                    | Normal |       | Emergency |                   |
|--------------------|--------|-------|-----------|-------------------|
|                    | W      | lumen | Lumen     | Lumen % of normal |
| Rax 150/200        | 27     | 2800  | 330       | 12%               |
| Rax 150/200        | 19     | 2120  | 350       | 17%               |
| Rax 150/200        | 14     | 1480  | 350       | 24%               |
| Mollor 1 corner    | 9      | 890   | 350       | 24%               |
| Mollor 4 corner    | 36     | 3950  | 360       | 41%               |
| Mollor 1 Line      | 14     | 1520  | 350       | 9%                |
| Mollor 2 Line      | 32     | 3440  | 360       | 24%               |
| Sense Eco          | 27     | 2600  | 310       | 12%               |
| Sense 3000 lm      | 22     | 2700  | 380       | 14%               |
| Sense 4000 lm      | 33     | 4000  | 380       | 10%               |
| Sense 5000 lm      | 46     | 4600  | 330       | 7%                |
| Sense Ø190         | 6      | 630   | 350       | 56%               |
| Sense Ø255         | 13     | 1370  | 320       | 24%               |
| Sense Ø320         | 17     | 1870  | 340       | 19%               |
| Sense Ø495         | 33     | 3620  | 340       | 10%               |
| Sense 300x300      | 27     | 2250  | 320       | 14%               |
| Junistar Lux       | 8      | 540   | 250       | 46%               |
| Junistar Soft/Slim | 11     | 800   | 260       | 33%               |
| UniLED             | 9      | 680   | 270       | 40%               |



5 7 0 3 8 2 1 1 7 7 3 4 4