

Lineal Suspended



Lineal suspended 1400 Black 4500lm 4000K Ra>80 DALI-2 / Push Dim

Article code: 8246094652
EAN: 5703821177993



Electrical

System wattage: 37W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 13, B16: 20, C10: 21, C16: 33
Leakage current (mA): 0.29

Light technic

Type of light source: LED
Luminous flux: 4500lm
Efficacy: 122 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B10>100,000
Lifetime: L93/>50,000
Light distribution: Direct/Indirect 50/50%
UGR: UGR<22
Photobiological safety: RG 1

Control/Dimming

Type: DALI-2 / Push Dim

Protection

Luminaire class: Class I
IK Class: IK08
IP Class: IP20

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes

Materials and finish

Housing: Aluminium
Colour: Black

Mounting/Connection


Mounting: Suspended, Indoor
Module: 1400
Wire set: 1x2m wire kit w/ceiling bracket
Connection: 5-pole Winsta mini with 5x2,5mm2 through wiring

Dimensions


Length (mm) L: 1401
Width (mm) W: 42
Height (mm) H: 70
Weight (kg) gross/net: 3.5 / 3.3

Packaging

Packing dimensions (mm): 1560 x 50 x 80

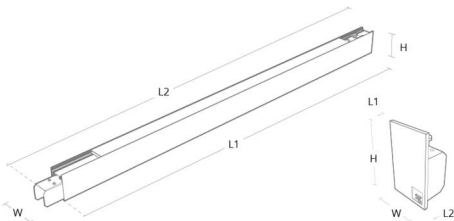

Module	W	H	L1	L2
840mm	42	70	841	891
1120mm	42	70	1121	1171
1400mm	42	70	1401	1451
End cap	42	70	3	28

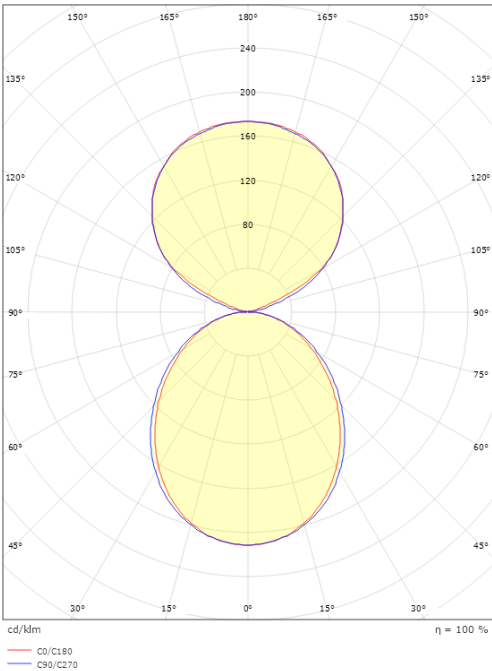

5 7 0 3 8 2 1 1 7 7 9 9 3