

Lineal Suspended



Lineal suspended 1400 White 4640lm 3000K Ra>80 DALI-2 / Push Dim

Article code: 8246094704
 EAN: 5703821178068



Electrical

System wattage: 37W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 13, B16: 20, C10: 21, C16: 33
 Leakage current (mA): 0.29

Light technic

Type of light source: LED
 Luminous flux: 4640lm
 Efficacy: 125 lm/W
 Colour temperature: 3000K
 Colour rendering (Ra): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L80/B10>100,000
 Lifetime: L93/>50,000
 Light distribution: Direct/Indirect 50/50%
 UGR: UGR<22
 Photobiological safety: RG 1

Control/Dimming

Type: DALI-2 / Push Dim

Protection

Luminaire class: Class I
 IK Class: IK08
 IP Class: IP20

Energy and approvals

Contains light source of energy class: D
 Breeam: Fulfils Hea 01 for flicker free lighting
 BVB: Yes

Materials and finish

Housing: Aluminium
 Colour: White

Mounting/Connection


Mounting: Suspended, Indoor
 Module: 1400
 Wire set: 1x2m wire kit w/ceiling bracket
 Connection: 5-pole Winsta mini with 5x2,5mm² through wiring

Dimensions


Length (mm) L: 1401
 Width (mm) W: 42
 Height (mm) H: 70
 Weight (kg) gross/net: 3.5 / 3.3

Packaging

Packing dimensions (mm): 1560 x 50 x 80

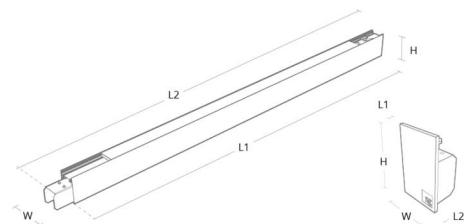

Module	W	H	L1	L2
840mm	42	70	841	891
1120mm	42	70	1121	1171
1400mm	42	70	1401	1451
End cap	42	70	3	28

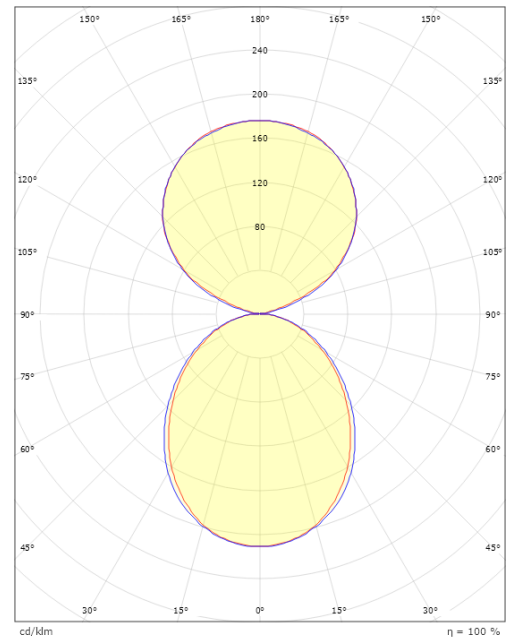

5 7 0 3 8 2 1 1 7 8 0 6 8