

# Lineal Suspended



## Lineal suspended 1400 Black 4500lm 4000K Ra>80 DALI Emergency 3H

Article code: 8246094859  
EAN: 5703821178549



• = This article is produced by order, with an expected delivery time of 3-4 weeks.



### Electrical

System wattage: 37W  
Voltage: 220-240V

### Light technic

Type of light source: LED  
Luminous flux: 4500lm  
Emergency lumen: EM 390lm  
Efficacy: 122 lm/W  
Colour temperature: 4000K  
Colour rendering (Ra): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L80/B10>100,000  
Lifetime: L93/>50,000  
Minimum ambient temperature: 0°C  
Light distribution: Direct/Indirect 50/50%  
UGR: UGR<22  
Photobiological safety: RG 1

### Control/Dimming

Type: DALI Emergency 3H

### Protection

Luminaire class: Class I  
IP Class: IP20

### Energy and approvals

Contains light source of energy class: D

### Materials and finish

Housing: Aluminium  
Colour: Black

### Mounting/Connection


Mounting: Suspended, Indoor  
Module: 1400  
Wire set: 1x2m wire kit w/ceiling bracket  
Connection: 5-pole Winsta mini with 5x2,5mm<sup>2</sup> through wiring

### Dimensions


Length (mm) L: 1401  
Width (mm) W: 42  
Height (mm) H: 70  
Weight (kg) gross/net: 3.3 / 3.1

### Packaging

Packing dimensions (mm): 1490 x 44 x 71

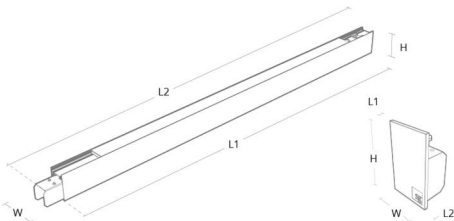

| Module  | W  | H  | L1   | L2   |
|---------|----|----|------|------|
| 840mm   | 42 | 70 | 841  | 891  |
| 1120mm  | 42 | 70 | 1121 | 1171 |
| 1400mm  | 42 | 70 | 1401 | 1451 |
| End cap | 42 | 70 | 3    | 28   |

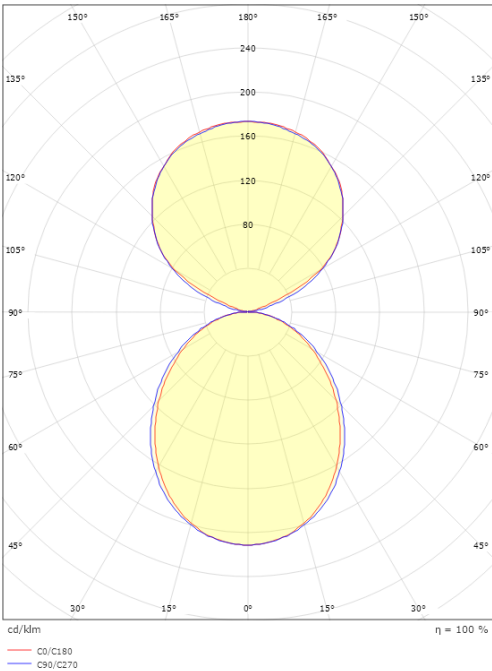

5 7 0 3 8 2 1 1 7 8 5 4 9