

# DiLED IV



## DiLED Iv 584x584 White 2240lm 4000K Ra>80 On/Off

Article code: 8246094966  
EAN: 5703821179034



• = This article is produced by order, with an expected delivery time of 3-4 weeks.



### Electrical

System wattage: 18W  
Voltage: 220-240V  
Frequency (Hz): 50/60Hz  
Max. luminaires per circuit breaker: B10: 20, B16: 30, C10: 31, C16: 51

### Light technic

Type of light source: LED  
Luminous flux: 2240lm  
Efficacy: 124 lm/W  
Colour temperature: 4000K  
Colour rendering (Ra): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L85/B10100,000  
Light distribution: Direct  
Optic: Prism Optic

### Control/Dimming

Type: On/Off

### Protection

Luminaire class: Class II  
IP Class: IP20

### Energy and approvals

Contains light source of energy class: D  
Breem: Fulfil Hea 01 for flicker free lighting

### Materials and finish

Housing: Sheet steel  
Colour: White smooth (Ral 9016 gloss 30)  
Optics: Acrylic (PMMA)

### Mounting/Connection



Mounting: Recessed, Indoor  
Module: 584x584 SAS 130 Alugrid Q(P)15/16  
Connection: Screwless terminal block

### Dimensions

Length (mm) L: 584  
Width (mm) W: 584  
Height (mm) H: 60  
Weight (kg) gross/net: 5 / 4.8

### Packaging

Packing dimensions (mm): 605 x 605 x 99

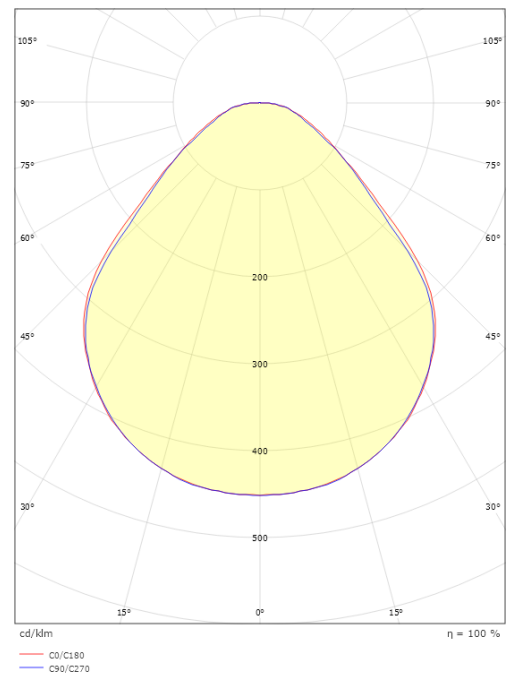

5 7 0 3 8 2 1 1 7 9 0 3 4