

DiLED IV



DiLED Iv 584x584 White 2240lm 4000K Ra>80 DALI-2

Article code: 8246094979
EAN: 5703821179478



• = This article is produced by order, with an expected delivery time of 3-4 weeks.



Electrical

System wattage: 18W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 32, B16: 50, C10: 52, C16: 85

Light technic

Type of light source: LED
Luminous flux: 2240lm
Efficacy: 124 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L85/B10100,000
Light distribution: Direct
Optic: Prism Optic
UGR: UGR<19

Control/Dimming

Type: DALI-2

Protection

Luminaire class: Class II
IP Class: IP20

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Sheet steel
Colour: White smooth (Ral 9016 gloss 30)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Recessed, Indoor
Module: 584x584 SAS 130 Alugrid Q(P)15/16
Connection: 5 pol Linect / screwless terminal block

Dimensions

Length (mm) L: 584
Width (mm) W: 584
Height (mm) H: 60
Weight (kg) gross/net: 5 / 4.8

Packaging

Packing dimensions (mm): 605 x 605 x 99

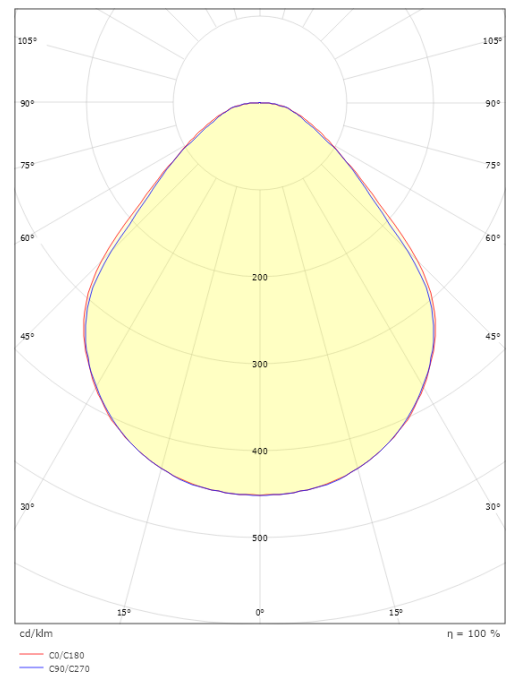

5 7 0 3 8 2 1 1 7 9 4 7 8