

DiLED IV Linear



DiLED Iv 300x1200 White 3830lm 4000K Ra>80 DALI-2

Article code: 8246095127
EAN: 5703821179386



• = This article is produced by order, with an expected delivery time of 3-4 weeks.



Electrical

System wattage: 33W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 35, B16: 55, C10: 51, C16: 94

Light technic

Type of light source: LED
Luminous flux: 3830lm
Efficacy: 116 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L85/B10100,000
Light distribution: Direct
Optic: Prism Optic
UGR: UGR<19

Control/Dimming

Type: DALI-2

Protection

Luminaire class: Class II

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Sheet steel
Colour: White
Optics: PMMA Polymethylmethacrylat, Aluminium

Mounting/Connection




Mounting: Indoor
Module: 300x1200 Exposed T-carrier 15/24mm

Dimensions

Length (mm) L: 1192
Width (mm) W: 292
Height (mm) H: 60
Weight (kg) gross/net: 5 / 4.8

Packaging

Packing dimensions (mm): 1235 x 305 x 100

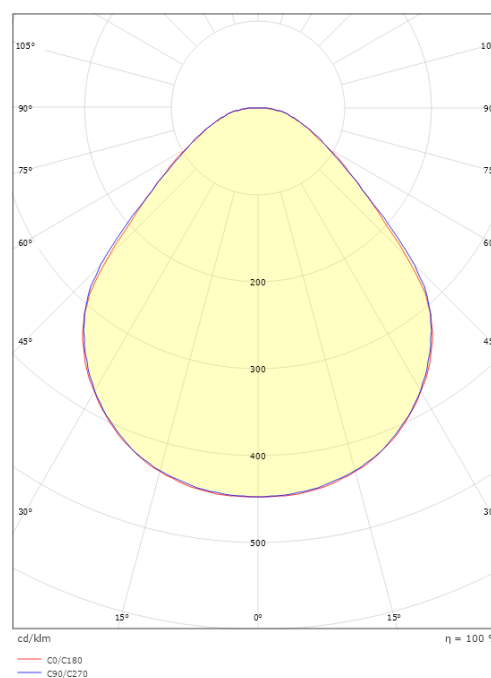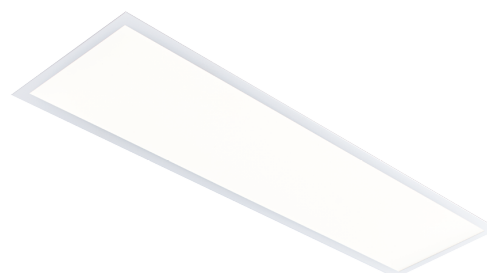

5 7 0 3 8 2 1 1 7 9 3 8 6