

DiLED IV TW



DiLED Iv 595x595 White 3320lm 2700-6500K Ra>80 TW DALI Type 8

Article code: 8246095156
EAN: 5703821179423

• = This article is produced by order, with an expected delivery time of 3-4 weeks.



Electrical

System wattage: 35W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 10, B16: 16, C10: 16, C16: 26

Light technic

Type of light source: LED
Luminous flux: 3320lm
Efficacy: 95 lm/W
Colour temperature: 2700-6500K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L90/B50>100,000
Lifetime: L95>50,000
Light distribution: Direct
Optic: Prism Optic

Control/Dimming

Type: TW DALI Type 8

Protection

Luminaire class: Class II
IP Class: IP20

Energy and approvals

Contains light source of energy class: D
Breem: Fulfil Hea 01 for flicker free lighting

Materials and finish

Housing: Sheet steel
Colour: White
Optics: PMMA Polymethylmethacrylat, Aluminium

Mounting/Connection




Mounting: Indoor
Module: 595x595 Exposed T-carrier 15/24mm
Connection: 5 pol Linect / screwless terminal block

Dimensions

Length (mm) L: 595
Width (mm) W: 595
Height (mm) H: 60
Weight (kg) gross/net: 5 / 4.8

Packaging

Packing dimensions (mm): 605 x 605 x 95

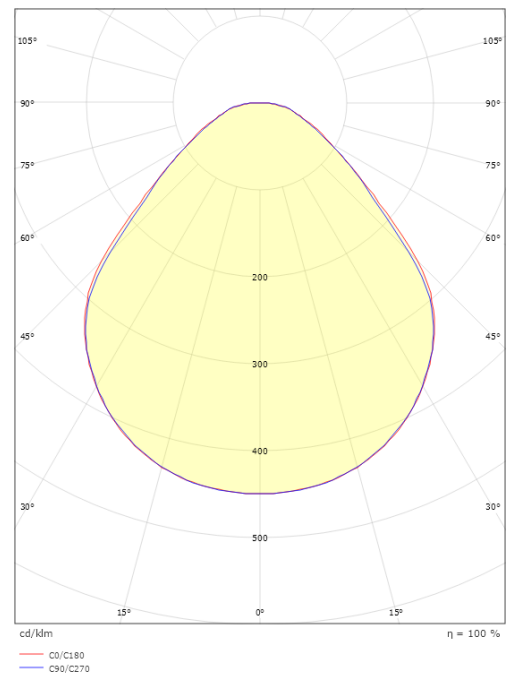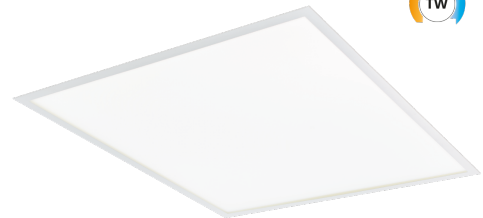

5 7 0 3 8 2 1 1 7 9 4 2 3