

Lineal Recessed



Lineal recessed 1400 White 2320lm 3000K Ra>80 DALI-2 / Push Dim

Article code: 8246095677
EAN: 5703821180184



Electrical

System wattage: 21W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 13, B16: 20, C10: 21, C16: 33
Leakage current (mA): 0.29

Light technic

Type of light source: LED
Luminous flux: 2320lm
Efficacy: 110 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B10>100,000
Lifetime: L93/>50,000
Light distribution: Direct
UGR: UGR<28
Photobiological safety: RG 0

Control/Dimming

Type: DALI-2 / Push Dim

Protection

Luminaire class: Class I
IK Class: IK08
IP Class: IP20

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: White (RAL 9003)

Mounting/Connection


Mounting: Recessed, Indoor
Module: 1400
Connection: 5-pole Winsta mini with 5x2,5mm2 through wiring

Dimensions

Length (mm) L: 1401
Width (mm) W: 62
Height (mm) H: 62
Weight (kg) gross/net: 2.9 / 2.6

Packaging

Packing dimensions (mm): 1505 x 71 x 64

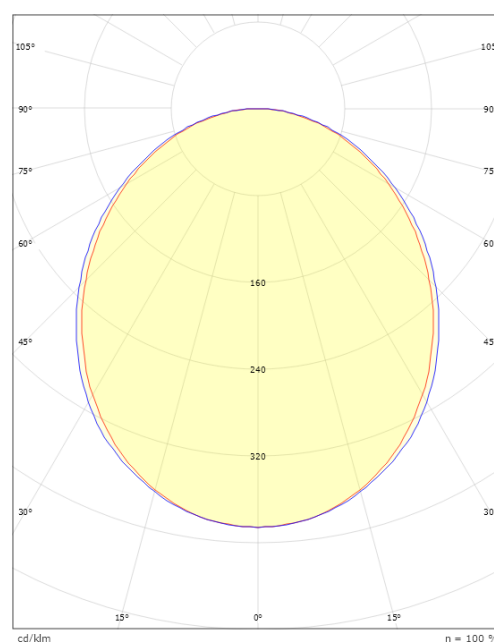

cd/kdm
C0/C180
C90/C270

$\eta = 100\%$



5 7 0 3 8 2 1 1 8 0 1 8 4