

Lineal Cubic Surface-Suspended



Lineal Cubic 840 Black 2300lm 4000K Ra>80 DALI-2 / Push Dim

Article code: 8246095790
EAN: 5703821180306



Electrical

System wattage: 18W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 32, B16: 50, C10: 52, C16: 85
Leakage current (mA): 0.01

Light technic

Luminous flux: 2300lm
Efficacy: 128 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L90/B10>100,000
Light distribution: Direct
Optic: Cubic Optic Black
UGR: UGR<19

Control/Dimming

Type: DALI-2 / Push Dim

Protection

Luminaire class: Class I
IP Class: IP20

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Black
Optics: Polycarbonat (PC)

Mounting/Connection



Mounting: Surface, Indoor
Module: 840
Connection: 5-pole Winsta mini with 5x2,5mm² through wiring

Dimensions

Length (mm) L: 841
Width (mm) W: 42
Height (mm) H: 70
Weight (kg) gross/net: 1.9 / 1.7

Packaging

Packing dimensions (mm): 970 x 71 x 44

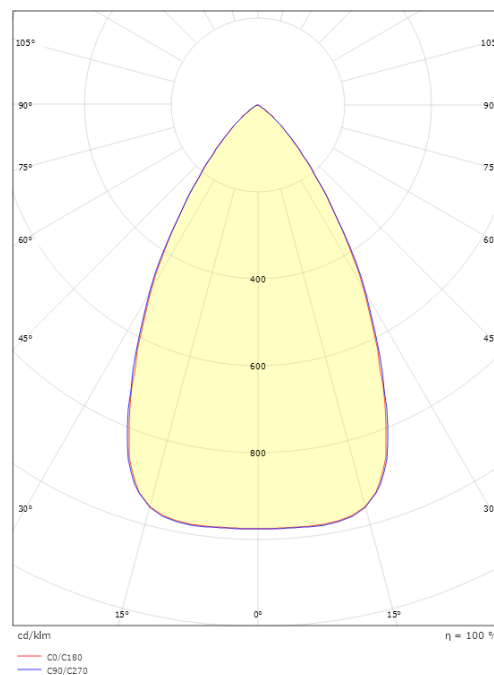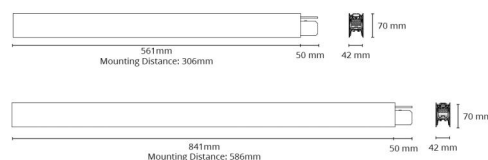

5 7 0 3 8 2 1 1 8 0 3 0 6