

# Lineal Cubic Recessed



## Lineal Recessed Cubic 840 White 2150lm 3000K Ra>80 DALI-2 / Push Dim

Article code: 8246096236  
EAN: 5703821181334



### Electrical

System wattage: 27W  
Voltage: 220-240V  
Frequency (Hz): 50/60Hz  
Max. luminaires per circuit breaker: B10: 32, B16: 50, C10: 52, C16: 85  
Leakage current (mA): 0.01

### Light technic

Luminous flux: 2150lm  
Efficacy: 80 lm/W  
Colour temperature: 3000K  
Colour rendering (Ra): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L90/B10>100,000  
Light distribution: Direct  
Optic: Cubic Optic Black  
UGR: UGR<19

### Control/Dimming

Type: DALI-2 / Push Dim

### Protection

Luminaire class: Class I  
IP Class: IP20

### Energy and approvals

Contains light source of energy class: D  
Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Aluminium  
Colour: White  
Optics: Polycarbonat (PC)

### Mounting/Connection




Mounting: Recessed, Indoor  
Module: 840  
Connection: 5-pole Winsta mini with 5x2,5mm<sup>2</sup> through wiring

### Dimensions

Length (mm) L: 841  
Width (mm) W: 62  
Height (mm) H: 62  
Ceiling void depth (mm): 105  
Weight (kg) gross/net: 2 / 1.8

### Packaging

Packing dimensions (mm): 970 x 82 x 72

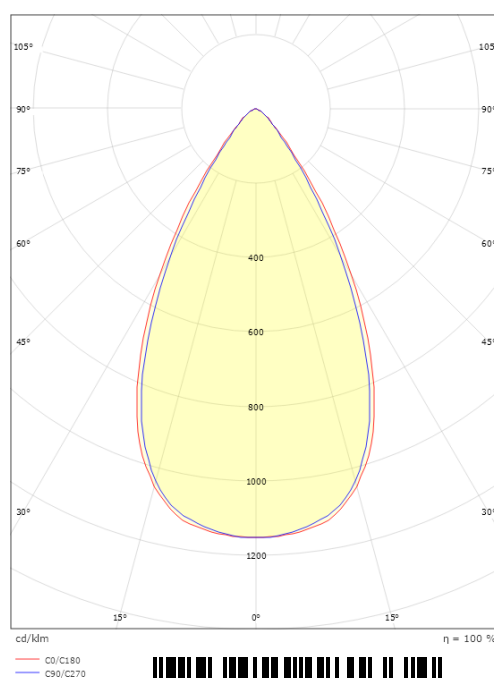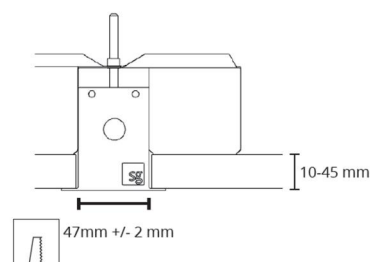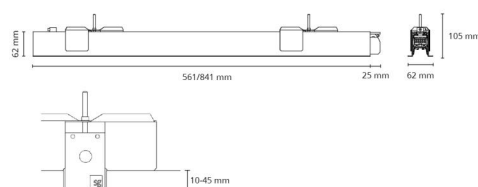

5 7 0 3 8 2 1 1 8 1 3 3 4