

Lineal Cubic Recessed



Lineal Recessed Cubic 840 White 2220lm 4000K Ra>80 DALI-2 / Push Dim

Article code: 8246096252
EAN: 5703821181341



Electrical

System wattage: 27W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 32, B16: 50, C10: 52, C16: 85
Leakage current (mA): 0.01

Light technic

Luminous flux: 2220lm
Efficacy: 82 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L90/B10>100,000
Light distribution: Direct
Optic: Cubic Optic Black
UGR: UGR<19

Control/Dimming

Type: DALI-2 / Push Dim

Protection

Luminaire class: Class I
IP Class: IP20

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: White
Optics: Polycarbonat (PC)

Mounting/Connection




Mounting: Recessed, Indoor
Module: 840
Connection: 5-pole Winsta mini with 5x2,5mm² through wiring

Dimensions

Length (mm) L: 841
Width (mm) W: 62
Height (mm) H: 62
Ceiling void depth (mm): 105
Weight (kg) gross/net: 2 / 1.8

Packaging

Packing dimensions (mm): 970 x 82 x 72

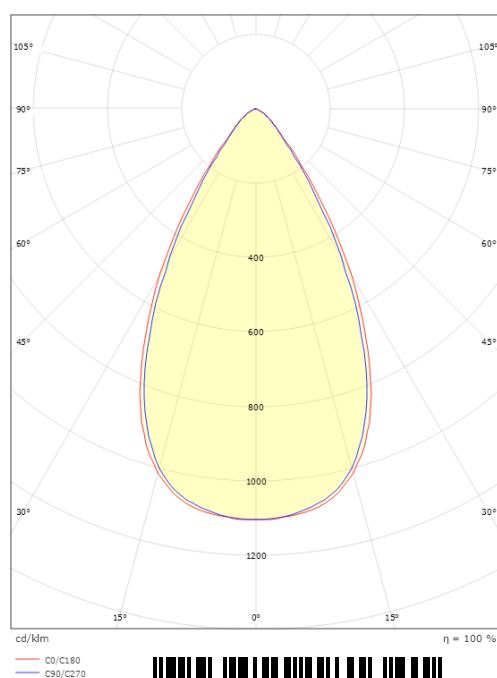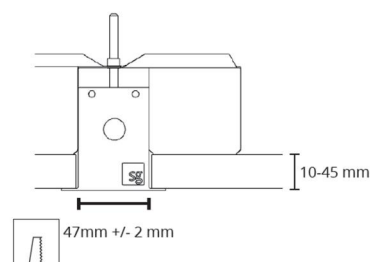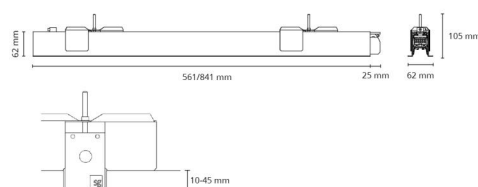

5 7 0 3 8 2 1 1 8 1 3 4 1