

Sense IP65




SENSE IP65 595x595 White 4840lm 3000K Ra>90 DALI Emergency 3H

Article code: 8246096346
EAN: 5703821181631



• = This article is produced by order, with an expected delivery time of 3-4 weeks.



Electrical

System wattage: 43W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 12, B16: 20, C10: 21, C16: 34
Leakage current (mA): 0.29

Light technic

Type of light source: LED
Luminous flux: 4840lm
Efficacy: 113 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>90
MacAdams factor: SDCM: 3
Lifetime: L80/B50>100,000
Lifetime: L90/B10>50,000
Minimum ambient temperature: 0°C
Light distribution: Direct
Optic: Prism Optic
UGR: UGR<19
Visible flicker (PstLM): 0.07
Stroboscopic flicker (SVM): 0.01

Control/Dimming

Type: DALI Emergency 3H

Protection

Luminaire class: Class I
IK Class: IK07
IP Class: IP54/IP65

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Sheet steel
Colour: White smooth (Ral 9016 gloss 30)
Optics: Tempered glass

Mounting/Connection



Mounting: Recessed, Indoor
Module: 595x595 Exposed T-carrier 15/24mm
Cable: Cable 5x0,75mm² 2,5m Halogen free

Dimensions

Length (mm) L: 595
Width (mm) W: 595
Height (mm) H: 94
Weight (kg) gross/net: 12.7 / 12.1

Packaging

Packing dimensions (mm): 625 x 605 x 97

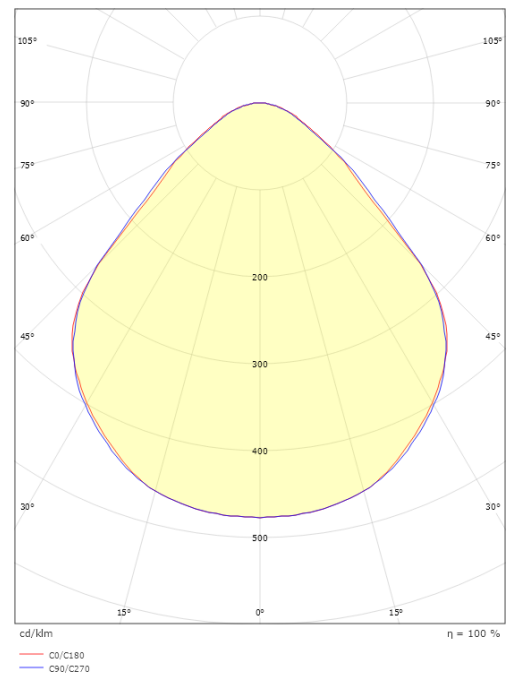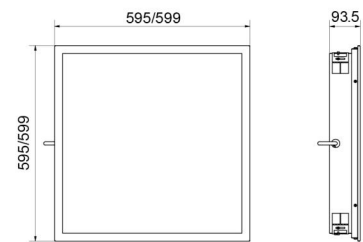

5 7 0 3 8 2 1 1 8 1 6 3 1