

Junistar Square IsoSafe DimToWarm /x2



Junistar Square IsoSafe DimToWarm White 550lm 2000-2800K Ra>95

Trailing edge

Article code: 901251
EAN: 7021989012511



Electrical

Wattage: 7W
System wattage: 8W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 550lm
Efficacy: 69 lm/W
Colour temperature: 2000-2800K
Colour rendering (Ra): Ra>95
MacAdams factor: SDCM: 3
Lifetime: L90/B10>50,000
Light distribution: Direct
Optic: Reflector
Beam angle: 42°
UGR: UGR<22

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II SELV
IP Class: IP44/IP20

Energy and approvals

Contains light source of energy class: F
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Matte white (RAL 9003)
Optics: Tempered glass

Mounting/Connection




Mounting: Recessed, Indoor
Connection: Screwless terminal block

Dimensions

Length (mm) L: 95
Width (mm) W: 95
Height (mm) H: 56
Cut-out (mm): 83
Ceiling void depth (mm): 54
Weight (kg) gross/net: 0.5 / 0.38

Packaging

Packing dimensions (mm): 130 x 115 x 85

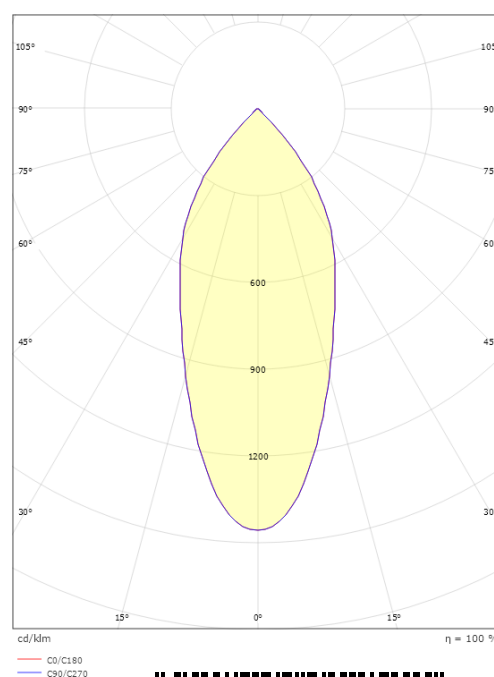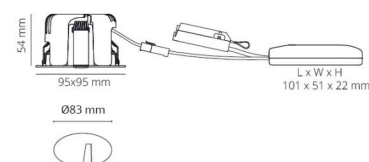

cd/km
— C0/C180
— C90/C270



7 0 2 1 9 8 9 0 1 2 5 1 1