

Junistar Lux IsoSafe



Junistar Lux IsoSafe Black 590lm 3000K Ra 98 Trailing edge

Article code: 902525
EAN: 7021989025252
Replaces: 901303



Electrical

Wattage: 7W
System wattage: 8W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 105, B16: 168, C10: 105, C16: 168

Light technic

Type of light source: LED
Luminous flux: 590lm
Efficacy: 74 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra 98
MacAdams factor: SDCM: 1
Lifetime: L90/B10>100,000
Light distribution: Direct
Optic: Reflector
Beam angle: 42°
UGR: UGR<22

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II SELV
IP Class: IP44/IP20

Energy and approvals

Contains light source of energy class: F
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Black (RAL 9004)
Optics: Tempered glass

Mounting/Connection




Mounting: Recessed, Indoor / Outdoor
Connection: Screwless terminal block

Dimensions

Height (mm) H: 56
Diameter (mm) D: 94
Cut-out (mm): 83
Ceiling void depth (mm): 54
Weight (kg) gross/net: 0.415 / 0.349

Packaging

Packing dimensions (mm): 130 x 115 x 75

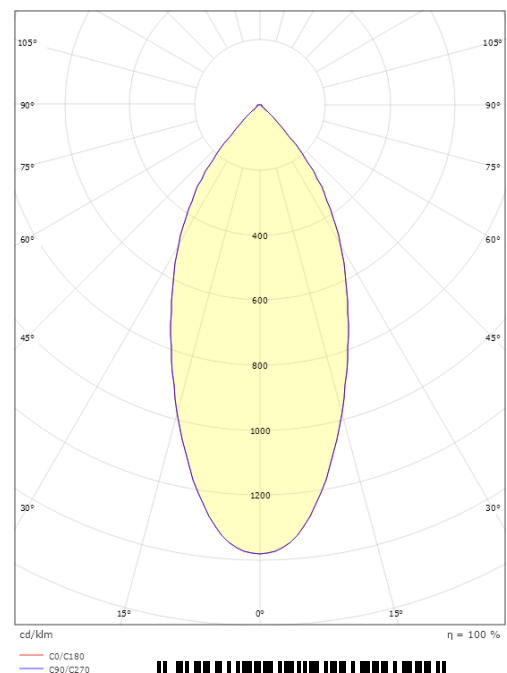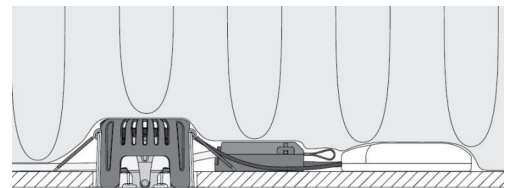

7 0 2 1 9 8 9 0 2 5 2 5 2