

Junistar Lux Square



Junistar Lux Square Brushed steel 2X 1180lm 3000K Ra 98 Trailing edge

Article code: 902594
EAN: 7021989025948



Electrical

Wattage: 2x7W
System wattage: 17W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 52, B16: 84, C10: 52, C16: 84

Light technic

Type of light source: LED
Luminous flux: 1180lm
Efficacy: 69 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra 98
MacAdams factor: SDCM: 1
Lifetime: L90/B10>100,000
Light distribution: Direct
Optic: Reflector
Beam angle: 42°
UGR: UGR<22

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II SELV
IP Class: IP44/IP20

Energy and approvals

Contains light source of energy class: F
Breem: Fulfil Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Brushed steel
Optics: Tempered glass

Mounting/Connection



Mounting: Recessed, Indoor
Connection: Screwless terminal block

Dimensions

Length (mm) L: 175
Width (mm) W: 95
Height (mm) H: 50
Cut-out (mm): 83
Ceiling void depth (mm): 48
Weight (kg) gross/net: 0.74 / 0.617

Packaging

Packing dimensions (mm): 185 x 120 x 75

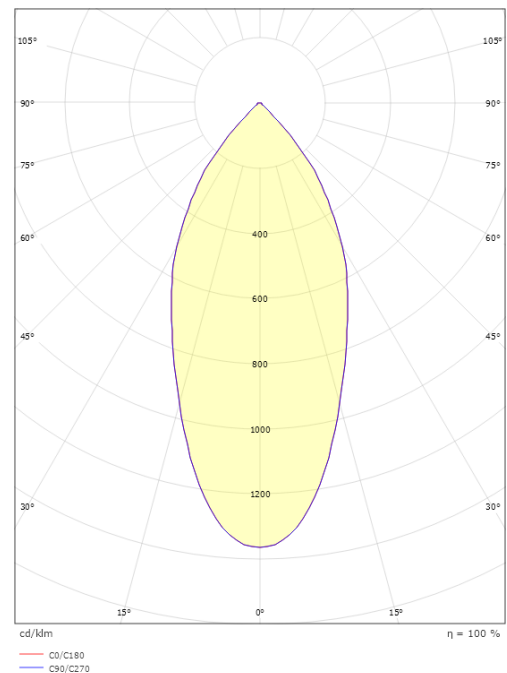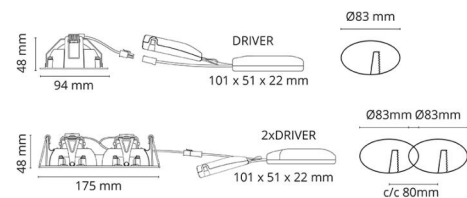

7 0 2 1 9 8 9 0 2 5 9 4 8