


# Soft Square



## Soft Square Black 880lm 2700K Ra 98 Trailing edge

Article code: 903250  
EAN: 7021989032502



### Electrical

System wattage: 12W  
Voltage: 220-240V  
Frequency (Hz): 50/60Hz  
Max. luminaires per circuit breaker: B10: 43, B16: 69, C10: 43, C16: 69

### Light technic

Type of light source: LED  
Luminous flux: 880lm  
Efficacy: 73 lm/W  
Colour temperature: 2700K  
Colour rendering (Ra): Ra 98  
MacAdams factor: SDCM: 1  
Lifetime: L80/B10>100,000  
Light distribution: Direct  
Optic: Reflector  
Beam angle: 60°  
UGR: UGR<19  
Photobiological safety: RG 1

### Control/Dimming

Type: Trailing edge

### Protection

Luminaire class: Class II SELV  
IK Class: IK10  
IP Class: IP43/IP20

### Energy and approvals

Contains light source of energy class: F  
Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Aluminium  
Colour: Black (RAL 9004)

### Mounting/Connection




Mounting: Recessed, Indoor  
Connection: Screwless terminal block

### Dimensions

Length (mm) L: 95  
Width (mm) W: 95  
Height (mm) H: 58  
Depth (D): 57  
Cut-out (mm): 83  
Ceiling void depth (mm): 57  
Weight (kg) gross/net: 0.498 / 0.436

### Packaging

Packing dimensions (mm): 170 x 280 x 100

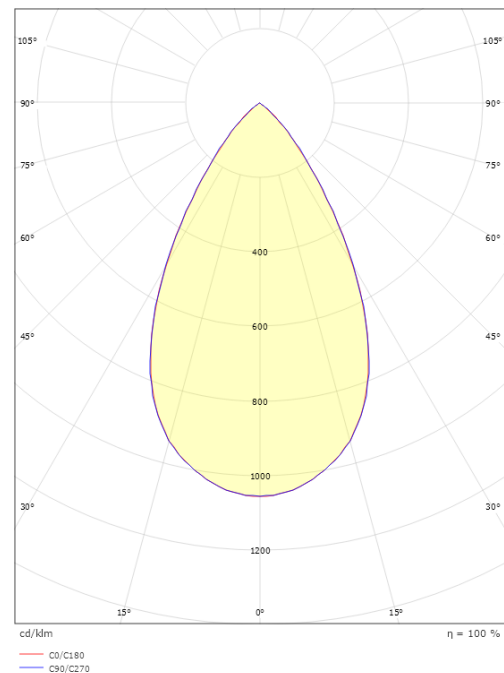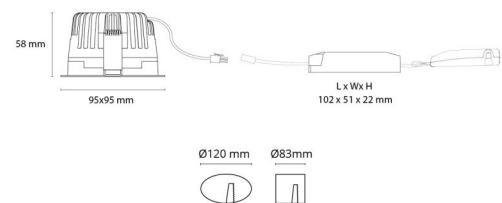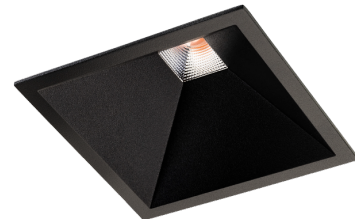

7 0 2 1 9 8 9 0 3 2 5 0 2