


Soft Square



Soft Square Black 890lm 3000K Ra 98 Trailing edge

Article code: 903251
EAN: 7021989032519



Electrical

System wattage: 12W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 890lm
Efficacy: 74 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra 98
MacAdams factor: SDCM: 1
Lifetime: L80/B10>100,000
Light distribution: Direct
Optic: Reflector
Beam angle: 60°
UGR: UGR<19
Photobiological safety: RG 1

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II SELV
IK Class: IK10
IP Class: IP43/IP20

Energy and approvals

Contains light source of energy class: F
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Black (RAL 9004)

Mounting/Connection




Mounting: Recessed, Indoor
Connection: Screwless terminal block

Dimensions

Length (mm) L: 95
Width (mm) W: 95
Height (mm) H: 58
Depth (D): 57
Cut-out (mm): 83
Ceiling void depth (mm): 57
Weight (kg) gross/net: 0.498 / 0.436

Packaging

Packing dimensions (mm): 170 x 280 x 100

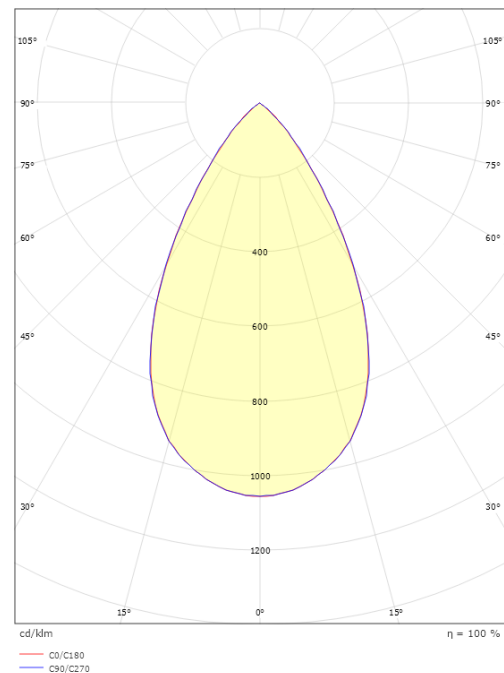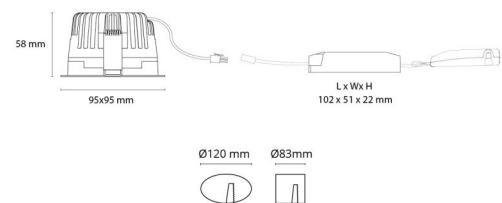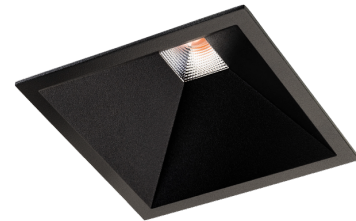

7 0 2 1 9 8 9 0 3 2 5 1 9