


Junistar Soft White 880lm 4000K Ra 98 Trailing edge / Linect

Article code: 903411
EAN: 7021989034117



Electrical

Wattage: 9W
System wattage: 11W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 77, B16: 123, C10: 77, C16: 123

Light technic

Type of light source: LED
Luminous flux: 880lm
Efficacy: 80 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra 98
MacAdams factor: SDCM: 2
Lifetime: L90/B10>100,000
Light distribution: Direct
Optic: Reflector
Beam angle: 42°
UGR: UGR<22
Photobiological safety: RG 1

Control/Dimming

Type: Trailing edge / Linect

Protection

Luminaire class: Class II SELV
IP Class: IP54/IP20

Energy and approvals

Contains light source of energy class: F
Bream: Fulfil Hea 01 for flicker free lighting
BVB: Yes

Materials and finish

Housing: Aluminium
Colour: Matte white (RAL 9003)
Optics: Tempered glass

Mounting/Connection



Mounting: Recessed, Indoor / Outdoor
Connection: 3 pol Linect / screwless terminal block

Dimensions

Height (mm) H: 53
Diameter (mm) D: 94
Cut-out (mm): 83
Ceiling void depth (mm): 51
Distance to flammable materials: 10mm
Weight (kg) gross/net: 0.46 / 0.41

Packaging

Packing dimensions (mm): 130 x 115 x 85

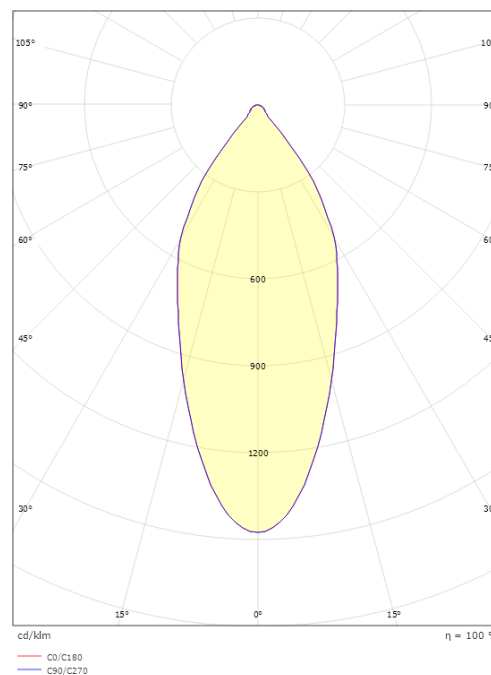

7 0 2 1 9 8 9 0 3 4 1 1 7