

Capella IsoSafe



Capella IsoSafe Black 25lm 2700K Ra>80 Trailing edge

Article code: 912033
EAN: 7021989120339



Electrical

System wattage: 2W
Voltage: 220-240V

Light technic

Type of light source: LED
Luminous flux: 25lm
Efficacy: 13 lm/W
Colour temperature: 2700K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B50>50,000
Light distribution: Direct/Asymmetric

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IP Class: IP20

Energy and approvals

Contains light source of energy class: G
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Black (RAL 9004)

Mounting/Connection


Mounting: Recessed, Indoor
Connection: Screwless terminal block

Dimensions

Length (mm) L: 90
Width (mm) W: 90
Height (mm) H: 90
Depth (D): 50
Cut-out (mm): 83
Weight (kg) gross/net: 0.294 / 0.245

Packaging

Packing dimensions (mm): 110 x 105 x 80

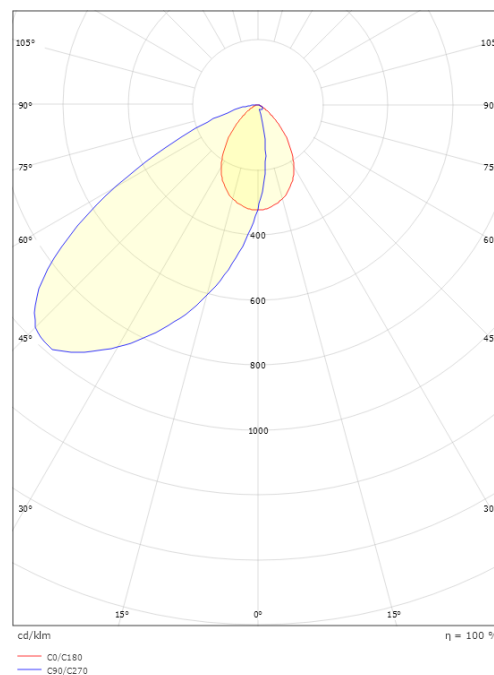

7 0 2 1 9 8 9 1 2 0 3 3 9