

Junistar IsoSafe TW



Junistar IsoSafe TW White 500lm (@ 4000K) 2000-4000K Ra>90 TW LEDDim

Article code: 912243
EAN: 7021989122432



Electrical

System wattage: 8.5W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 74, B16: 118, C10: 74, C16: 118

Light technic

Type of light source: LED
Luminous flux: 500lm (@ 4000K)
Efficacy: 59 lm/W
Colour temperature: 2000-4000K
Colour rendering (Ra): Ra>90
MacAdams factor: SDCM: 2
Lifetime: L90/B10>100,000
Light distribution: Direct
Optic: Reflector
Beam angle: 42°

Control/Dimming

Type: TW LEDDim

Protection

Luminaire class: Class II SELV
IP Class: IP44/IP20

Energy and approvals

Contains light source of energy class: F
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: White (RAL 9003)
Optics: Tempered glass

Mounting/Connection



Mounting: Recessed, Indoor
Connection: Screwless terminal block

Dimensions

Diameter (mm) D: 94
Cut-out (mm): 83
Ceiling void depth (mm): 48
Weight (kg) gross/net: 0.43 / 0.384

Packaging

Packing dimensions (mm): 115 x 115 x 95

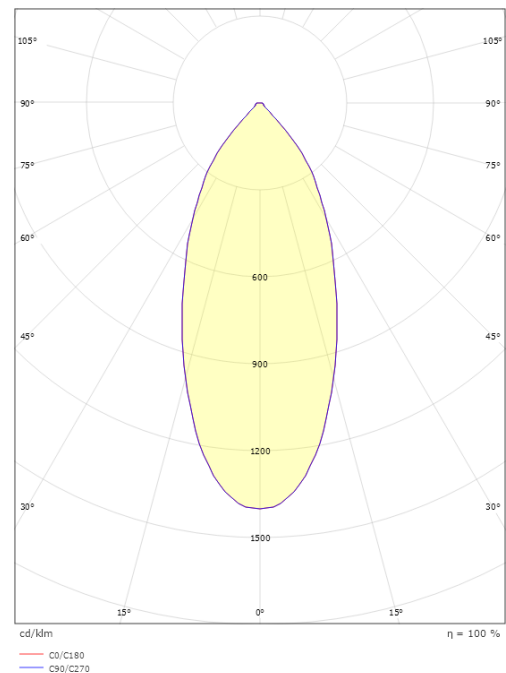

7 0 2 1 9 8 9 1 2 2 4 3 2