

Callisto Bollard



Callisto Pole Graphite 110lm 3000K Ra>80 Trailing edge

Article code: 923005
EAN: 7021989230052



Electrical

System wattage: 3W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 115, B16: 184, C10: 134, C16: 215

Light technic

Type of light source: LED
Luminous flux: 110lm
Efficacy: 37 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L70/B50>50,000
Light distribution: Direct/Asymmetric
Optic: Glass Clear
Beam angle: 65°/85°

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class I
IP Class: IP44

Energy and approvals

Contains light source of energy class: F
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Graphite
Optics: Tempered glass

Mounting/Connection



Mounting: Pole, wall, bollard or earthing rod, Outdoor
Connection: Screwless terminal block

Dimensions

Width (mm) W: 180
Height (mm) H: 600
Depth (D): 100
Weight (kg) gross/net: 2.28 / 1.9

Packaging

Packing dimensions (mm): 615 x 188 x 108

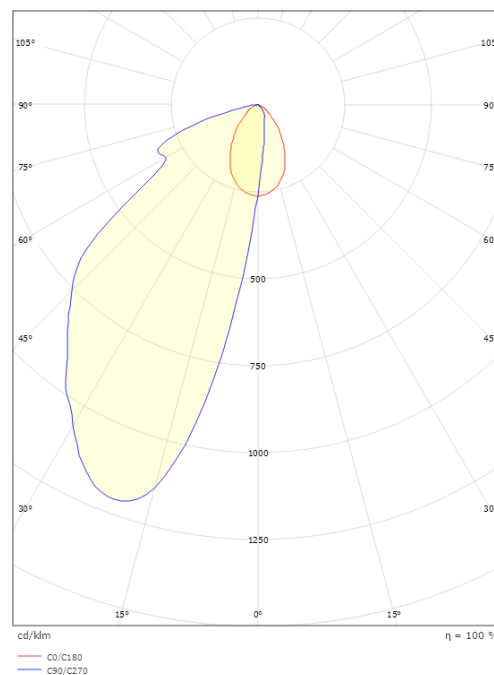

7 0 2 1 9 8 9 2 3 0 0 5 2