

Callisto Wall



Callisto Wall Graphite 110lm 4000K Ra>80 Trailing edge

Article code: 923016
EAN: 7021989230168



Electrical

System wattage: 3W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 115, B16: 184, C10: 134, C16: 215

Light technic

Type of light source: LED
Luminous flux: 110lm
Efficacy: 37 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L70/B50>50,000
Light distribution: Direct/Asymmetric
Optic: Glass Clear
Beam angle: 70°/40°

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IK Class: IK06
IP Class: IP65

Energy and approvals

Contains light source of energy class: F
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes

Materials and finish

Housing: Aluminium
Colour: Graphite
Optics: Tempered glass

Mounting/Connection


Mounting: Surface, Indoor / Outdoor
Connection: Screwless terminal block

Dimensions

Height (mm) H: 35
Diameter (mm) D: 110
Weight (kg) gross/net: 0.3 / 0.238

Packaging

Packing dimensions (mm): 120 x 115 x 45

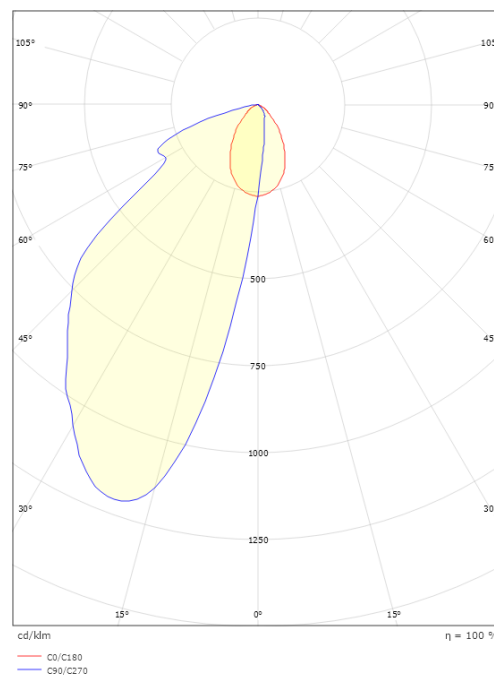

7 0 2 1 9 8 9 2 3 0 1 6 8