

# Jupiter Pro



## Jupiter Pro 1500 Graphite 40° 1580lm 3000K Ra>90 Trailing edge

Article code: 923988  
EAN: 7021989239888



### Electrical

System wattage: 15W  
Voltage: 220-240V

### Light technic

Type of light source: LED  
Luminous flux: 1580lm  
Efficacy: 105 lm/W  
Colour temperature: 3000K  
Colour rendering (Ra): Ra>90  
MacAdams factor: SDCM: 2  
Lifetime: L90/B10>50,000  
Light distribution: Direct  
Optic: Reflector  
Beam angle: 40°

### Control/Dimming

Type: Trailing edge

### Protection

Luminaire class: Class II SELV  
IP Class: IP65/IP20

### Energy and approvals

Contains light source of energy class: E

### Materials and finish

Housing: Aluminium  
Colour: Graphite  
Optics: Tempered glass

### Mounting/Connection



Mounting: Recessed, Indoor / Outdoor  
Module: 1500  
Connection: Screwless terminal block

### Dimensions

Height (mm) H: 112  
Diameter (mm) D: 114  
Cut-out (mm): 83  
Ceiling void depth (mm): 110  
Distance to flammable materials: 100mm  
Weight (kg) gross/net: 0.755 / 0.9

### Packaging

Packing dimensions (mm): 140 x 140 x 140

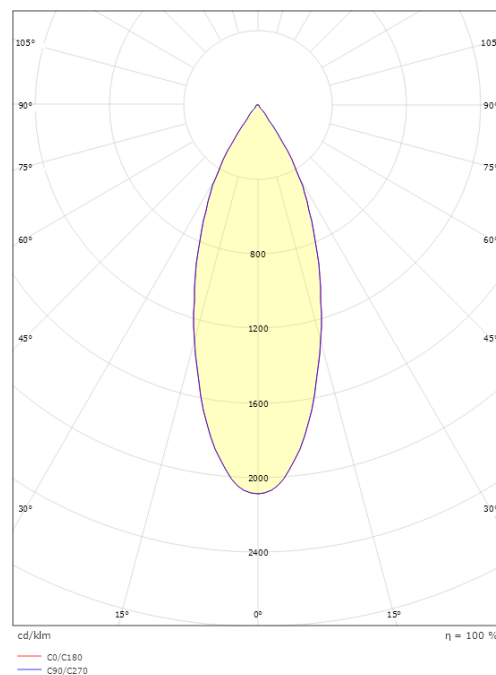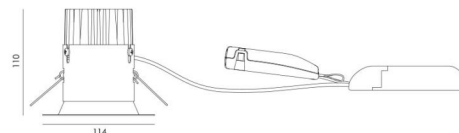

7 0 2 1 9 8 9 2 3 9 8 8 8