

Polar IP65



Polar IP65 White 455lm 3000K Ra>80 Trailing edge

Article code: 932951
EAN: 7021989329510



Electrical

System wattage: 6.2W
Voltage: 220-240V

Light technic

Type of light source: LED
Socket: GU10
Light source included: Yes
Luminous flux: 455lm
Efficacy: 73 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 4
Lifetime: L70/B50>25,000
Light distribution: Direct
Beam angle: 36°

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IP Class: IP65/IP20

Energy and approvals

Contains light source of energy class: F
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Matte white (RAL 9003)

Mounting/Connection


Mounting: Recessed, Indoor / Outdoor
Connection: Screwless terminal block

Dimensions

Height (mm) H: 132
Diameter (mm) D: 98
Cut-out (mm): 84
Ceiling void depth (mm): 130
Distance to flammable materials: 50mm
Weight (kg) gross/net: 0.29 / 0.29

Packaging

Packing dimensions (mm): 115 x 100 x 133

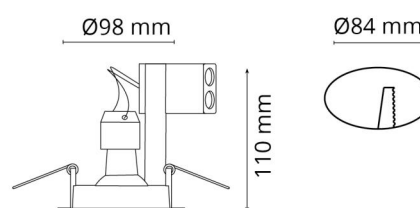

7 0 2 1 9 8 9 3 2 9 5 1 0