

Lineal Surface Connect



Lineal surface 1400 White 2320lm 3000K Ra>80 Connect

Article code: 9341000675
EAN: 5703821206044



Electrical

System wattage: 21W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 26, B16: 42, C10: 44, C16: 70

Light technic

Type of light source: LED
Luminous flux: 2320lm
Efficacy: 110 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B10>100,000
Lifetime: L93/>50,000
Light distribution: Direct

Control/Dimming

Type: Connect

Protection

Luminaire class: Class I
IK Class: IK08
IP Class: IP20

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: White (RAL 9003)

Mounting/Connection



Mounting: Surface, Indoor
Module: 1400

Dimensions


Length (mm) L: 1472
Width (mm) W: 42
Height (mm) H: 70
Weight (kg) gross/net: 3.5 / 2.9

Packaging

Packing dimensions (mm): 1630 x 47 x 85

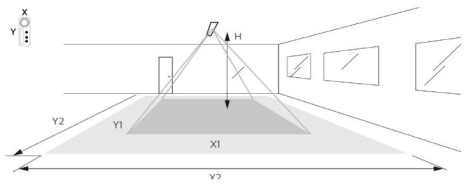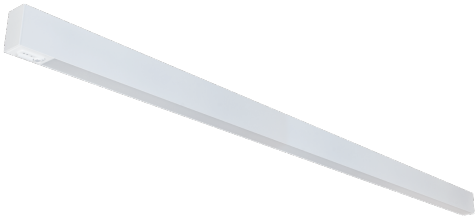

H (m)	Minor movements		Major movements	
	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
2.4	1.9	2.9	2.9	4.3
3	2.4	3.6	3.6	5.4

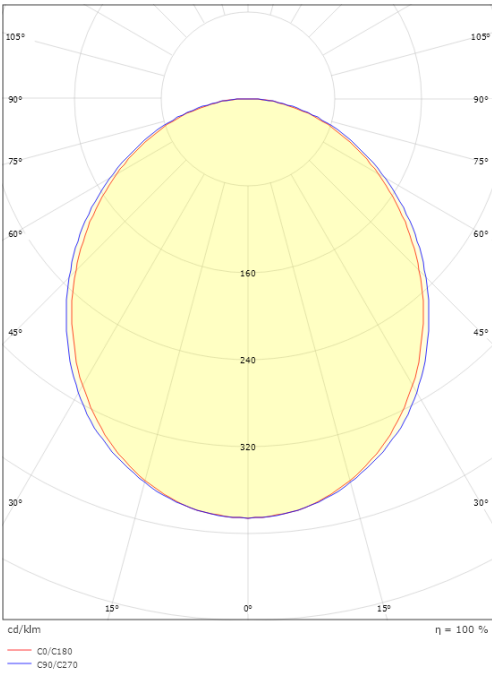

5 7 0 3 8 2 1 2 0 6 0 4 4