

Jupiter Pro Soft



Jupiter Pro Soft White 1850lm 4000K Ra>90 DALI-2 / Push Dim

Article code: 940353
EAN: 7021989403531

• = This article is produced by order, with an expected delivery time of 3-4 weeks.



Electrical

System wattage: 22W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 31, B16: 50, C10: 52, C16: 85

Light technic

Type of light source: LED
Luminous flux: 1850lm
Efficacy: 84 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>90
MacAdams factor: SDCM: 2
Lifetime: L90/B10>100,000
Light distribution: Direct
Optic: Reflector
Beam angle: 35°
UGR: UGR<10

Control/Dimming

Type: DALI-2 / Push Dim

Protection

Luminaire class: Class II SELV
IP Class: IP65/IP20

Energy and approvals

Contains light source of energy class: E
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: White (RAL 9003)
Optics: Tempered glass

Mounting/Connection



Mounting: Recessed, Indoor / Outdoor
Connection: Quick connector

Dimensions

Height (mm) H: 130
Diameter (mm) D: 114
Cut-out (mm): 83
Ceiling void depth (mm): 130
Distance to flammable materials: 50mm
Weight (kg) gross/net: 1.09 / 0.91

Packaging

Packing dimensions (mm): 142 x 142 x 140

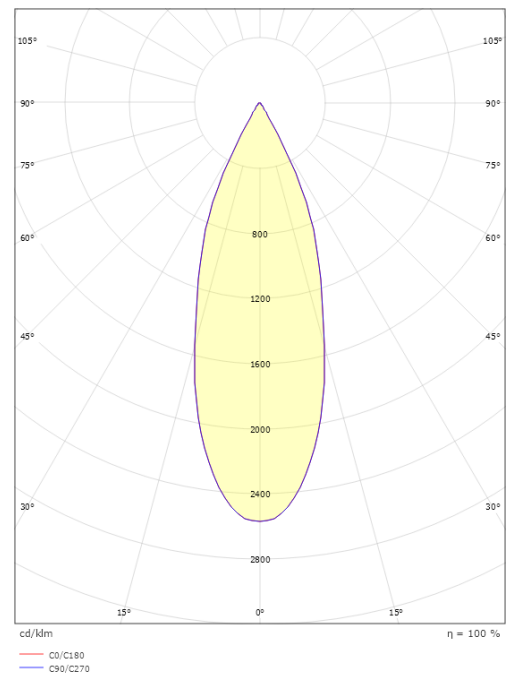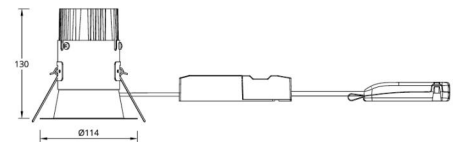

7 0 2 1 9 8 9 4 0 3 5 3 1