


Jupiter Pro



Jupiter Pro 2200 White 60° 2090lm 3000K Ra>90 Trailing edge

Article code: 960300
EAN: 7021989603009



Electrical

System wattage: 22W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 2090lm
Efficacy: 95 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>90
MacAdams factor: SDCM: 2
Lifetime: L90/B10>100,000
Light distribution: Direct
Optic: Reflector
Beam angle: 60°
UGR: UGR<25

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II SELV
IP Class: IP65/IP20

Energy and approvals

Contains light source of energy class: E
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes

Materials and finish

Housing: Aluminium
Colour: Matte white (RAL 9003)
Optics: Tempered glass

Mounting/Connection




Mounting: Recessed, Indoor / Outdoor
Module: 2200
Connection: Screwless terminal block

Dimensions

Height (mm) H: 112
Diameter (mm) D: 114
Cut-out (mm): 83
Ceiling void depth (mm): 110
Distance to flammable materials: 100mm
Weight (kg) gross/net: 1.08 / 0.9

Packaging

Packing dimensions (mm): 830 x 120 x 130

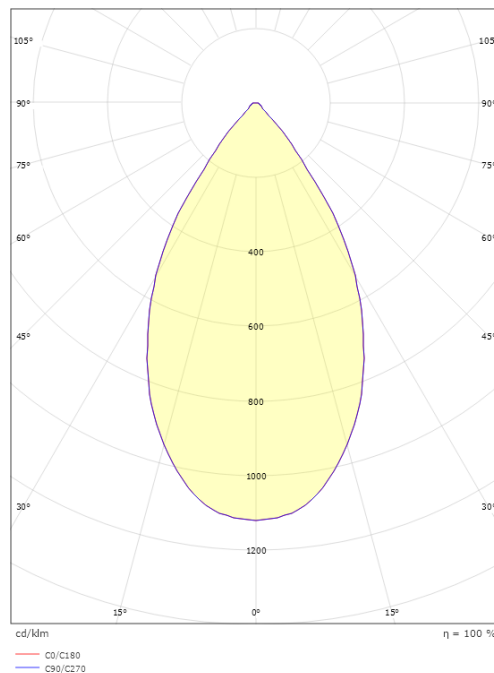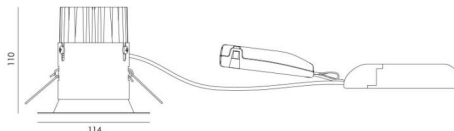

7 0 2 1 9 8 9 6 0 3 0 0 9