



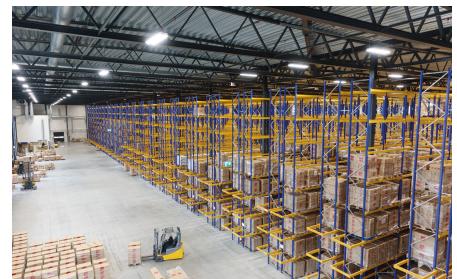

Arena is an energy efficient surface mounted IP23 luminaire for use in industry and storage. It is easy to install with hinged gear tray, and can be mounted either direct on ceiling (screws) or by using the mounting hooks for horizontal wiring. Arena is available in two lengths and with three different light distributions. 5/7-pole terminal block with 5/7x2,5mm² through wiring. Cable entry in end caps through grommet.

Product- and environment images

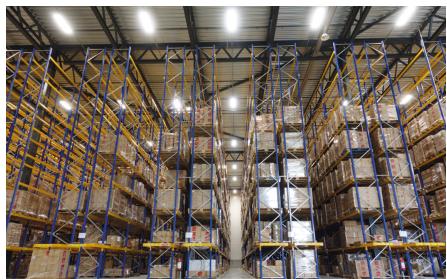

Article codes



Article		Protection	Control gear	Mounting/Connection	Dimensions
	607053 Arena 1700 White Medium 21360lm 4000K Ra>80 DALI-2 133W LED 161 lm/W SDCM:3 L81/B50>100,000, L90>50,000 Beam: Medium, Direct, Lens Medium	Class I IP23	DALI-2	Suspended or surface, Indoor 7-pole screwless terminal block with 7x2,5mm ² through wiring	L1767 x W135 x H72
	8246092489 Arena 1200 White Medium 11720lm 4000K Ra>80 DALI-2 71W LED 165 lm/W SDCM:3 L90/B10>70,000, L80/B20>100,000 Beam: Medium, Direct, Lens Medium	Class I IP23 IK08	DALI-2	Suspended or surface, Indoor 7-pole screwless terminal block with 5x2,5mm ² (+DALI) through wiring	L1194 x W138 x H63
	8246093530 Arena 1200 White Medium 9000lm 4000K Ra>80 DALI-2 57W LED 158 lm/W SDCM:3 L90/B10>70,000, L80/B20>100,000 Beam: Medium, Direct, Lens Medium	Class I IP23 IK08	DALI-2	Suspended or surface, Indoor 7-pole screwless terminal block with 5x2,5mm ² (+DALI) through wiring	L1194 x W138 x H63
	8246093873 Arena 1200 White Medium 23580lm 4000K Ra>80 DALI-2 144W LED 164 lm/W SDCM:3 L90/B10>70,000, L80/B20>100,000 Beam: Medium, Direct, Lens Medium	Class I IP23 IK08	DALI-2	Suspended or surface, Indoor 7-pole screwless terminal block with 5x2,5mm ² (+DALI) through wiring	L1256 x W295 x H57
	8246093912 • Arena 1200 White Narrow 23530lm 4000K Ra>80 DALI-2 144W LED 163 lm/W SDCM:3 L90/B10>70,000, L80/B20>100,000 Beam: Narrow, Direct, Lens Narrow	Class I IP23 IK08	DALI-2	Suspended or surface, Indoor 7-pole screwless terminal block with 5x2,5mm ² (+DALI) through wiring	L1256 x W295 x H57
	8246093938 • Arena 1200 White Wide 23230lm 4000K Ra>80 DALI-2 144W LED 161 lm/W SDCM:3 L90/B10>70,000, L80/B20>100,000 Beam: Wide, Direct, Lens Wide	Class I IP23 IK08	DALI-2	Suspended or surface, Indoor 7-pole screwless terminal block with 5x2,5mm ² (+DALI) through wiring	L1256 x W295 x H57

Article codes



Article		Protection	Control gear	Mounting/Connection	Dimensions
	8246092476 Arena 1200 White Medium 11830lm 4000K Ra>80 On/Off 79W LED 150 lm/W SDCM:3 L90/B10>70,000, L80/B20>100,000 Beam: Medium, Direct, Lens Medium	Class I IP23 IK08	On/Off	Suspended or surface, Indoor 5-pole screwless terminal block with 5x2,5mm ² through wiring	L1194 x W138 x H63
	8246093527 Arena 1200 White Medium 9000lm 4000K Ra>80 On/Off 57W LED 158 lm/W SDCM:3 L90/B10>70,000, L80/B20>100,000 Beam: Medium, Direct, Lens Medium	Class I IP23 IK08	On/Off	Suspended or surface, Indoor 5-pole screwless terminal block with 5x2,5mm ² through wiring	L1194 x W138 x H63
	8246093860 Arena 1200 White Medium 23580lm 4000K Ra>80 On/Off 140W LED 168 lm/W SDCM:3 L90/B10>70,000, L80/B20>100,000 Beam: Medium, Direct, Lens Medium	Class I IP23 IK08	On/Off	Suspended or surface, Indoor 5-pole screwless terminal block with 5x2,5mm ² through wiring	L1256 x W295 x H57
	8246093909 • Arena 1200 White Narrow 23530lm 4000K Ra>80 On/Off 140W LED 168 lm/W SDCM:3 L90/B10>70,000, L80/B20>100,000 Beam: Narrow, Direct, Lens Narrow	Class I IP23 IK08	On/Off	Suspended or surface, Indoor 5-pole screwless terminal block with 5x2,5mm ² through wiring	L1256 x W295 x H57
	8246093925 • Arena 1200 White Wide 23230lm 4000K Ra>80 On/Off 140W LED 166 lm/W SDCM:3 L90/B10>70,000, L80/B20>100,000 Beam: Wide, Direct, Lens Wide	Class I IP23 IK08	On/Off	Suspended or surface, Indoor 5-pole screwless terminal block with 5x2,5mm ² through wiring	L1256 x W295 x H57
	8246094212 Arena 1200 White Wide 8980lm 4000K Ra>80 On/Off 57W LED 158 lm/W SDCM:3 L90/B10>70,000, L80/B20>100,000 Beam: Wide, Direct, Lens Wide	Class I IP23 IK08	On/Off	Suspended or surface, Indoor 5-pole screwless terminal block with 5x2,5mm ² through wiring	L1194 x W138 x H63

Article codes



Article		Protection	Control gear	Mounting/Connection	Dimensions
	8246094539 Arena 1200 White Wide 11800lm 4000K Ra>80 On/Off 79W LED 149 lm/W SDCM:3 L90/B10>70,000, L80/B20>100,000 Beam: Wide, Direct, Lens Wide	Class I IP23 IK08	On/Off	Suspended or surface, Indoor 5-pole screwless terminal block with 5x2,5mm ² through wiring	L1194 x W138 x H63
	8246094762 Arena 1500 White Wide 11800lm 4000K Ra>80 On/Off 79W LED 149 lm/W SDCM:3 L90/B10>70,000, L80/B20>100,000 Beam: Wide, Direct, Lens Wide	Class I IP23 IK08	On/Off	Suspended or surface, Indoor 5-pole screwless terminal block with 5x2,5mm ² through wiring	L1769 x W137 x H57
	8246094801 Arena 1700 White Wide 16830lm 4000K Ra>80 On/Off 113W LED 149 lm/W SDCM:3 L90/B10>50,000 Beam: Wide, Direct, Lens Wide	Class I IP23 IK08	On/Off	Suspended or surface, Indoor 5-pole screwless terminal block with 5x2,5mm ² through wiring	L1842 x W137 x H59
Accessories					
	8249045174 Shopline DALI White Adapter kit	Class I IP20		Indoor Cable 5x0,75mm ² 0,3m	
	8249045187 • Shopline White Adapter kit	Class I IP20		Indoor Cable 3x0,75mm ² 0,3m	
	820259 Start current limiter DIN 16A				L90 x W18 x H58
	8249044900 Wirekit 2x5m				L19 x W25 x H150
	8249044913 Mounting kit for adjustable angulation				L100 x W98 x H95

• = This article is produced by order, with an expected delivery time of 3-4 weeks.