


DiLED IV Linear








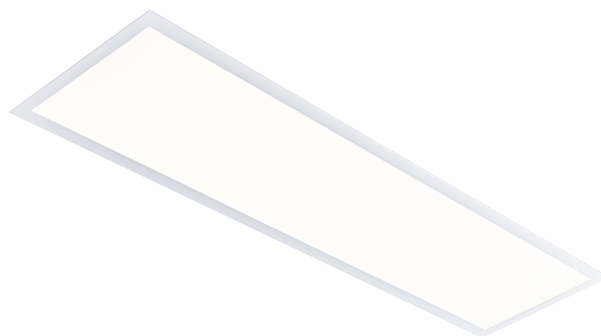


DiLED IV Linear is a recessed mounted luminaire for most known ceiling systems in different modules. DiLED IV Linear is suitable for office and general lighting indoor. The opal or prismatic optic front ensures a uniformly lit surface. Complete with driver and quick connection between driver and luminaire for super quick and easy mounting. Available with on/off or Dali control. Emergency box to be ordered separately.

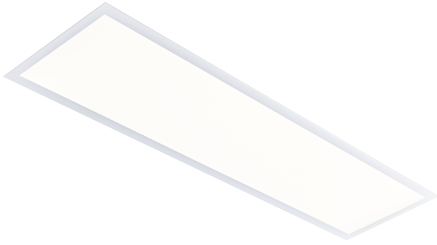DiLED IV Linear



Product- and environment images



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>8246095127 • DiLED Iv 300x1200 White 3830lm 4000K Ra>80 DALI-2 33W LED 116 lm/W SDCM:3 L85/B10100,000 Direct, Prism Optic</p>	Class II	DALI-2	Indoor	L1192 x W292 x H60
 <p>8246095143 • DiLED Iv 297x1194 White 3830lm 4000K Ra>80 DALI-2 33W LED 116 lm/W L85/B10100,000 Direct, Prism Optic</p>		DALI-2	Indoor	
 <p>8246095114 • DiLED Iv 300x1200 White 3830lm 4000K Ra>80 On/Off 33W LED 116 lm/W SDCM:3 L85/B10100,000 Direct, Prism Optic</p>	Class II	On/Off	Indoor	L1192 x W292 x H60
 <p>8246095130 • DiLED Iv 297x1194 3830lm 4000K Ra>80 On/Off 33W LED 116 lm/W L85/B10100,000 Direct, Prism Optic</p>		On/Off	Indoor	
Accessories				
 <p>8246094429 Emergencybox Driver DALI / EM Self test, DALI Emergency 3H</p>				L270 x W75 x H35
 <p>8246094364 Emergencybox On-Off/Trailing edge / EM Self test, Emergency 3 hours</p>				L270 x W75 x H35
 <p>8246094500 Emergencybox Driver DALI / EM DALI/Self test, Emergency 3 hours</p>				L270 x W75 x H35

• = This article is produced by order, with an expected delivery time of 3-4 weeks.