





Design: Christian Hvidt. Spot LED luminaire. IP66 simple LED luminaire. Base and top made of die-cast aluminium, front made of tempered glass. Light grey or black frame treated for use outdoors. Direct optics with several solutions. Complete with LED driver for operation of LED light sources mounted to component rail. Pre-mounted with connecting cable (10 m). Prepared for mounting on a mast. Safety class IIWax is as standard available with 13o and 27o reflector (45o reflector on request). Mast and wall consoles are not included but are sold separately. Design: Christian Hvidt

Wax



Product- and environment images

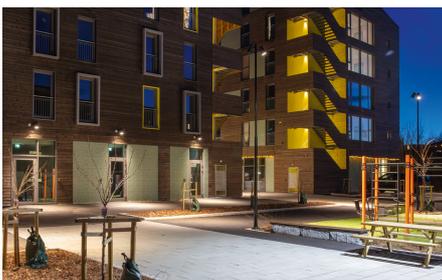

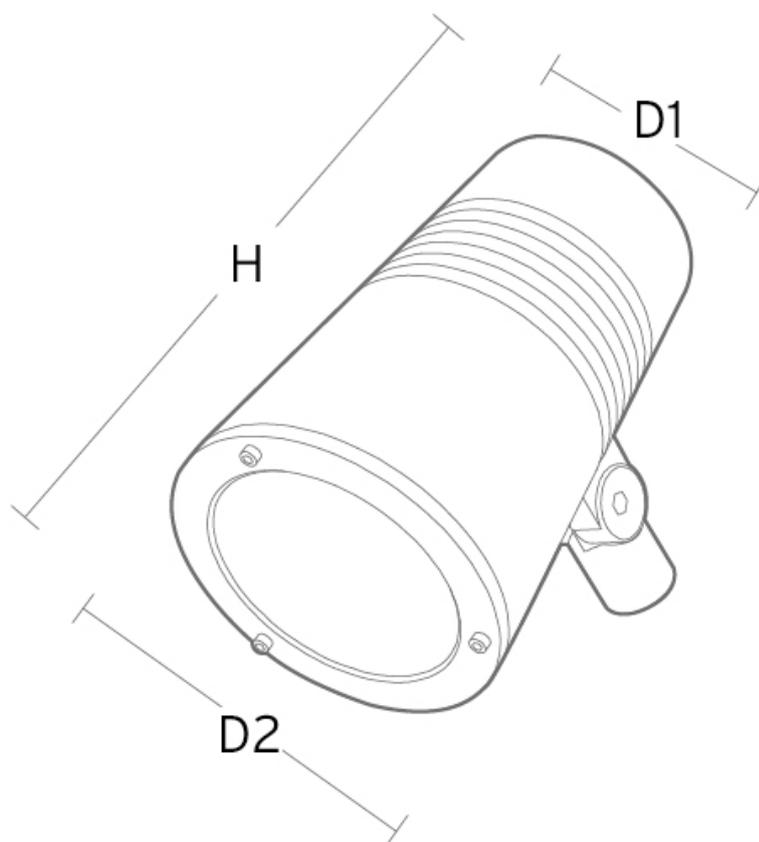

For line drawing dimensions please see each single article codes on next page

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>8246091503 ● Wax Black 27° 3500lm 3000K Ra>80 Lumistep LS8 50% Dim 34W LED 103 lm/W SDCM:2 L90/B10>100,000 Beam: 27°, Direct, Reflector Flood 27dg.</p>	Class II IP66 IK07	Lumistep LS8 50% Dim	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x H268
 <p>8246091545 ● Wax Black 13° 3200lm 3000K Ra>80 Lumistep LS8 50% Dim 48W LED 67 lm/W SDCM:2 L90/B10>100,000 Beam: 13°, Direct, Reflector spot 13dg.</p>	Class II IP66 IK07	Lumistep LS8 50% Dim	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x H268
 <p>8246091464 Wax Black 27° 1450/2420lm 3000K Ra>80 On/Off LED 89/90lm/W SDCM:2 L90/B10>100,000 Beam: 27°, Direct, Reflector Flood 27dg.</p>	Class II IP66 IK07	On/Off	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x H268
 <p>8246091480 ● Wax Black 13° 1370/2460lm 3000K Ra>80 On/Off LED 91/82lm/W SDCM:2 L90/B10>100,000 Beam: 13°, Direct, Reflector spot 13dg.</p>	Class II IP66 IK07	On/Off	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x L180 x W180 x H268
 <p>8246091516 Wax Black 27° 3500lm 3000K Ra>80 On/Off 34W LED 103 lm/W SDCM:2 L90/B10>100,000 Beam: 27°, Direct, Reflector Flood 27dg.</p>	Class II IP66 IK07	On/Off	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x H268

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>8246091558 • Wax Black 13° 3200lm 3000K Ra>80 On/Off 48W LED 67 lm/W SDCM:2 L90/B10>100,000 Beam: 13°, Direct, Reflector spot 13dg.</p>	Class II IP66 IK07	On/Off	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x H268
 <p>8246090669 • Wax Grey 13° 3200lm 3000K Ra>80 Lumistep LS8 50% Dim 48W LED 67 lm/W SDCM:2 L90/B10>100,000 Beam: 13°, Direct, Reflector spot 13dg.</p>	Class II IP66 IK07	Lumistep LS8 50% Dim	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x H268
 <p>8246090685 • Wax Grey 27° 3500lm 3000K Ra>80 Lumistep LS8 50% Dim 34W LED 103 lm/W SDCM:2 L90/B10>100,000 Beam: 27°, Direct, Reflector Flood 27dg.</p>	Class II IP66 IK07	Lumistep LS8 50% Dim	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x H268
 <p>8246090708 • Wax Grey 13° 3200lm 3000K Ra>80 On/Off 48W LED 67 lm/W SDCM:2 L90/B10>100,000 Beam: 13°, Direct, Reflector spot 13dg.</p>	Class II IP66 IK07	On/Off	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x H268
 <p>8246090711 Wax Grey 27° 3500lm 3000K Ra>80 On/Off 34W LED 103 lm/W SDCM:2 L90/B10>100,000 Beam: 27°, Direct, Reflector Flood 27dg.</p>	Class II IP66 IK07	On/Off	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x H268

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>8246090724 • Wax Grey 13° 1370/2460lm 3000K Ra>80 On/Off LED 91/82lm/W SDCM:2 L90/B10>100,000 Beam: 13°, Direct, Reflector spot 13dg.</p>	Class II IP66 IK07	On/Off	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x H268
 <p>8246090986 Wax Grey 27° 1450/2420lm 3000K Ra>80 On/Off LED 89/90lm/W SDCM:2 L90/B10>100,000 Beam: 27°, Direct, Reflector Flood 27dg.</p>	Class II IP66 IK07	On/Off	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x H268
 <p>8246091529 • Wax Black 27° 3710lm 4000K Ra>80 Lumistep LS8 50% Dim 41W LED 90 lm/W SDCM:2 L90/B10>100,000 Beam: 27°, Direct, Reflector Flood 27dg.</p>	Class II IP66 IK07	Lumistep LS8 50% Dim	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x H268
 <p>8246091561 • Wax Black 13° 3200lm 4000K Ra>80 Lumistep LS8 50% Dim 48W LED 67 lm/W SDCM:2 L90/B10>100,000 Beam: 13°, Direct, Reflector spot 13dg.</p>	Class II IP66 IK07	Lumistep LS8 50% Dim	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x H268
 <p>8246091477 Wax Black 27° 1480/2520lm 4000K Ra>80 On/Off LED 93/93lm/W SDCM:2 L90/B10>100,000 Beam: 27°, Direct, Reflector Flood 27dg.</p>	Class II IP66 IK07	On/Off	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x H268

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>8246091493 • Wax Black 13° 1370/2460lm 4000K Ra>80 On/Off LED 91/82lm/W SDCM:2 L90/B10>100,000 Beam: 13°, Direct, Reflector spot 13dg.</p>	Class II IP66 IK07	On/Off	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x H268
 <p>8246091532 Wax Black 27° 3710lm 4000K Ra>80 On/Off 41W LED 90 lm/W SDCM:2 L90/B10>100,000 Beam: 27°, Direct, Reflector Flood 27dg.</p>	Class II IP66 IK07	On/Off	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x H268
 <p>8246091008 • Wax Grey 13° 3200lm 4000K Ra>80 Lumistep LS8 50% Dim 48W LED 67 lm/W SDCM:2 L90/B10>100,000 Beam: 13°, Direct, Reflector spot 13dg.</p>	Class II IP66 IK07	Lumistep LS8 50% Dim	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x H268
 <p>8246091011 • Wax Grey 27° 3710lm 4000K Ra>80 Lumistep LS8 50% Dim 41W LED 90 lm/W SDCM:2 L90/B10>100,000 Beam: 27°, Direct, Reflector Flood 27dg.</p>	Class II IP66 IK07	Lumistep LS8 50% Dim	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x H268
 <p>8246087397 • Wax Grey 13° 3200lm 4000K Ra>80 On/Off 48W LED 67 lm/W SDCM:2 L90/B10>100,000 Beam: 13°, Direct, Reflector spot 13dg.</p>	Class II IP66 IK07	On/Off	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x H268

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>8246090672 Wax Grey 27° 3710lm 4000K Ra>80 On/Off 41W LED 90 lm/W SDCM:2 L90/B10>100,000 Beam: 27°, Direct, Reflector Flood 27dg.</p>	Class II IP66 IK07	On/Off	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x H268
 <p>8246090698 Wax Grey 13° 1370/2460lm 4000K Ra>80 On/Off LED 91/82lm/W SDCM:2 L90/B10>100,000 Beam: 13°, Direct, Reflector spot 13dg.</p>	Class II IP66 IK07	On/Off	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x L180 x W180 x H268
 <p>8246090999 Wax Grey 27° 1480/2520lm 4000K Ra>80 On/Off LED 93/93lm/W SDCM:2 L90/B10>100,000 Beam: 27°, Direct, Reflector Flood 27dg.</p>	Class II IP66 IK07	On/Off	Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm ² 10m	Ø180 x H268
Accessories				
 <p>8249044285 Wax Black Earthspear</p>				L406 x W80 x H80
 <p>8249044298 Wax Black Pole and wall consol</p>				L90 x W45 x H49
 <p>8249044308 Wax Black</p>				L759 x W160 x H160
 <p>8249044311 Wax Black Visor</p>				L179 x W179 x H110
 <p>8249044324 Wax Black Wall arm</p>				L550 x W136 x H136

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 8249044337 Wax Black Wall box				L136 x W136 x H49
 8249044418 • Wax Black Design pole 4m				L4800 x W120 x H120
 8249044421 • Wax Black Design pole 6m				L6800 x W132 x H132
 8249044434 • Wax Black Design pole 8m				L8800 x W153 x H153
 8249044845 Wax Black Side arm				Ø40 x L120
 8249044162 Wax Galvanized Pole conical 4m				L4800 x W120 x H120
 8249044175 Wax Galvanized Pole conical 6m				L6800 x W132 x H132
 8249044188 Wax Galvanized Pole conical 8m				L8800 x W153 x H153
 8249044052 Wax Grey Wall box				L136 x W136 x H49
 8249044065 Wax Grey Earthspear				L406 x W80 x H80

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 8249044078 Wax Grey Visor				L179 x W179 x H110
 8249044081 Wax Grey Pole and wall consol				L90 x W45 x H49
 8249044117 Wax Grey Wall arm				L550 x W136 x H136
 8249044120 Wax Grey Bollard				L759 x W160 x H160
 8249044227 [•] Wax Grey Design pole 4m				L4800 x W120 x H120
 8249044230 [•] Wax Grey Design pole 6m				L6800 x W132 x H132
 8249044243 [•] Wax Grey Design pole 8m				L8800 x W153 x H153
 8249044832 Wax Grey Side arm				Ø40 x L120
 8249042067 Ground anchor				Ø155 x L248 x W108 x H450
 8249042070 Ground anchor f/'Cetong'				Ø155 x H450

[•] = This article is produced by order, with an expected delivery time of 3-4 weeks.