


Capella IsoSafe




Capella IsoSafe is a wall spotlight for mounting at low heights. Well-suited for lighting stairways or as night lighting. Made of die-cast aluminium and powder-coated in black or white. Our IsoSafe products can be mounted directly into the insulation. Comes with SG Lighting's new switch box with fixing for plastic piping.

Capella IsoSafe

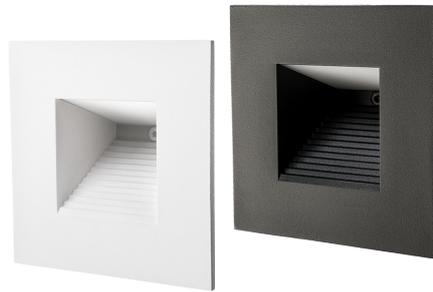

Product- and environment images

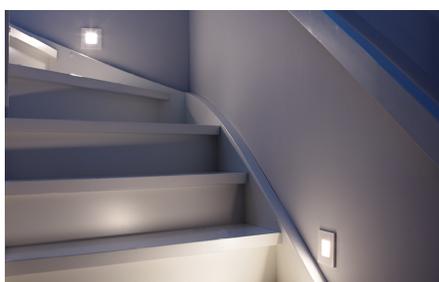

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>912033 Capella IsoSafe Black 25lm 2700K Ra>80 Trailing edge 2W LED 13 lm/W SDCM:3 L80/B50>50,000 Direct/Asymmetric,</p>	Class II IP20	Trailing edge	Recessed, Indoor Screwless terminal block	W90 x H90 x D50
 <p>912030 Capella IsoSafe White 60lm 2700K Ra>80 Trailing edge 2W LED 30 lm/W SDCM:3 L80/B50>50,000 Direct/Asymmetric,</p>	Class II IP20	Trailing edge	Recessed, Indoor Screwless terminal block	W90 x H90 x D50
 <p>912034 Capella IsoSafe Black 25lm 3000K Ra>80 Trailing edge 2W LED 13 lm/W SDCM:3 L80/B50>50,000 Direct/Asymmetric,</p>	Class II IP20	Trailing edge	Recessed, Indoor Screwless terminal block	W90 x H90 x D50
 <p>912031 Capella IsoSafe White 60lm 3000K Ra>80 Trailing edge 2W LED 30 lm/W SDCM:3 L80/B50>50,000 Direct/Asymmetric,</p>	Class II IP20	Trailing edge	Recessed, Indoor Screwless terminal block	W90 x H90 x D50
 <p>912039 Capella IsoSafe Black 25lm 4000K Ra>80 Trailing edge 2W LED 13 lm/W SDCM:3 L80/B50>50,000 Direct/Asymmetric,</p>	Class II IP20	Trailing edge	Recessed, Indoor Screwless terminal block	W90 x H90 x D50
 <p>912032 Capella IsoSafe White 60lm 4000K Ra>80 Trailing edge 2W LED 30 lm/W SDCM:3 L80/B50>50,000 Direct/Asymmetric,</p>	Class II IP20	Trailing edge	Recessed, Indoor Screwless terminal block	W90 x H90 x D50