



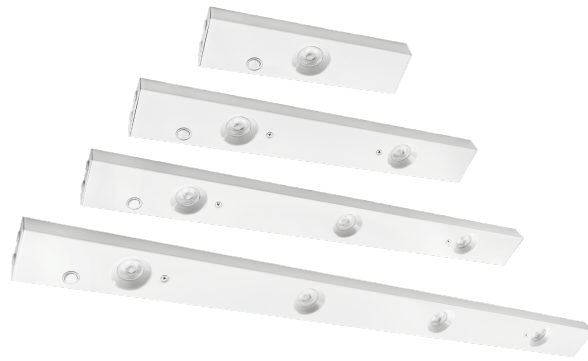

Under cabinet luminaire with 1–4 spots. Four lengths of replaceable LED modules, integrated switch, high RA value, dimmable driver integrated and simple to mount using loopable terminals and extra terminal for additional wiring. Its total height of only 30 mm makes it usable in many places.

Product- and environment images

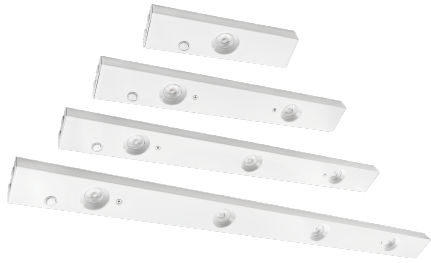

Article codes



Article		Protection	Control gear	Mounting/Connection	Dimensions
	391061 Chef White DimToWarm 300lm 2000-2800K Ra>90 Trailing edge 5W LED 60 lm/W SDCM:3 L70/B50>50,000 Direct, Lens	Class I IP21	Trailing edge	Surface, Indoor Screwless terminal block	L275 x W75 x H30
	391062 Chef White DimToWarm 600lm 2000-2800K Ra>90 Trailing edge 10W LED 60 lm/W SDCM:3 L70/B50>50,000 Direct, Lens	Class I IP21	Trailing edge	Surface, Indoor Screwless terminal block	L553 x W75 x H30
	391051 Chef White 350lm 2700K Ra>90 Trailing edge 5W LED 70 lm/W SDCM:2 L70/B50>50,000 Direct, Lens	Class II IP21	Trailing edge	Surface, Indoor Screwless terminal block	L275 x W75 x H30
	391052 Chef White 700lm 2700K Ra>90 Trailing edge 10W LED 70 lm/W SDCM:2 L70/B50>50,000 Direct, Lens	Class II IP21	Trailing edge	Surface, Indoor 4-pole screwless terminal block with 4x2,5mm ² through wiring	L553 x W75 x H30
	391053 Chef White 1050lm 2700K Ra>90 Trailing edge 15W LED 70 lm/W SDCM:2 L70/B50>50,000 Direct, Lens	Class II IP21	Trailing edge	Surface, Indoor 4-pole screwless terminal block with 4x2,5mm ² through wiring	L828 x W75 x H30
	391054 Chef White 1400lm 2700K Ra>90 Trailing edge 20W LED 70 lm/W SDCM:2 L70/B50>50,000 Direct, Lens	Class II IP21	Trailing edge	Surface, Indoor 4-pole screwless terminal block with 4x2,5mm ² through wiring	L1104 x W75 x H30

Article codes



Article		Protection	Control gear	Mounting/Connection	Dimensions
	391055	Class II	Trailing edge	Surface, Indoor	L275 x W75 x H30
	Chef White 360lm 3000K Ra>90	IP21		Screwless terminal block	
	Trailing edge				
	5W LED				
	72 lm/W SDCM:2 L70/B50>50,000 Direct, Lens				
	391056	Class II	Trailing edge	Surface, Indoor	L553 x W75 x H30
	Chef White 720lm 3000K Ra>90	IP21		4-pole screwless terminal block with	
	Trailing edge			4x2,5mm ² through wiring	
	10W LED				
	72 lm/W SDCM:2 L70/B50>50,000 Direct, Lens				
	391057	Class II	Trailing edge	Surface, Indoor	L828 x W75 x H30
	Chef White 1080lm 3000K Ra>90	IP21		4-pole screwless terminal block with	
	Trailing edge			4x2,5mm ² through wiring	
	15W LED				
	72 lm/W SDCM:2 L70/B50>50,000 Direct, Lens				
	391058	Class II	Trailing edge	Surface, Indoor	L1104 x W75 x H30
	Chef White 1440lm 3000K Ra>90	IP21		4-pole screwless terminal block with	
	Trailing edge			4x2,5mm ² through wiring	
	20W LED				
	72 lm/W SDCM:2 L70/B50>50,000 Direct, Lens				