

# Econ LED




Round lamp in several sizes. Vandal-resistant with impact-resistant polycarbonate opalescent diffuser. The whole luminaire has been approved for common access routes and has vandal-resistant rating IK10. KI II, two cable inputs and the option of additional looping using the integrated quick clips. Can be mounted to either the wall or ceiling with both concealed and visible cabling. Many light source variants and sensors, wireless control and emergency light.

# Econ LED



## Product- and environment images

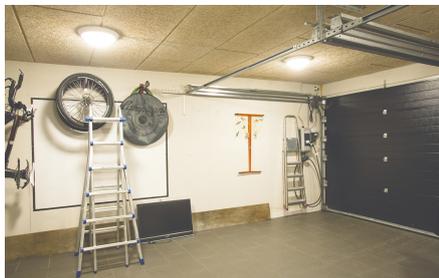

Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>181194  <b>Econ LED White 790lm 3000K Ra&gt;80</b>  <b>Sensor</b>  <b>10W LED</b>            79 lm/W SDCM:3            L70/B10&gt;50,000            Beam: 120°, Direct, Opal</p>	<b>Class II</b> <b>IP44</b> <b>IK10</b>	Sensor	Surface, Indoor Screwless terminal block	Ø300 x H92
 <p>181195  <b>Econ LED White 790lm 3000K Ra&gt;80</b>  <b>Sensor Wireless</b>  <b>10W LED</b>            79 lm/W SDCM:3            L70/B10&gt;50,000            Beam: 120°, Direct, Opal</p>	<b>Class II</b> <b>IP44</b> <b>IK10</b>	Sensor Wireless	Surface, Indoor Screwless terminal block	Ø300 x H92
 <p>181193  <b>Econ LED White 790lm 3000K Ra&gt;80</b>  <b>Trailing edge</b>  <b>10W LED</b>            79 lm/W SDCM:3            L70/B10&gt;50,000            Beam: 120°, Direct, Opal</p>	<b>Class II</b> <b>IP44</b> <b>IK10</b>	Trailing edge	Surface, Indoor Screwless terminal block	Ø300 x H92
 <p>181184  <b>Econ LED White 740lm 3000K Ra&gt;80</b>  <b>Wireless Actuator</b>  <b>10W LED</b>            74 lm/W SDCM:3            L70/B50&gt;45,000            Beam: 120°, Direct, Opal</p>	<b>Class II</b> <b>IP44</b> <b>IK10</b>	Wireless Actuator	Surface, Indoor Screwless terminal block	Ø300 x H92
<b>Accessories</b>				
 <p>1633  <b>Econ LED Diffuser</b></p>				Ø245 x H70