

# Junistar Square IsoSafe DimToWarm



Attractive single or double downlight for indoor use with 30-degree 360-degree stepless tilt.

DimToWarm 2800K–2000K via phase-dimming. Tool-free mounting, with possibility of looping. It includes a junction box that provides strain relief for several types of cables, as well as fixation for plastic tubing. Our IsoSafe products can be mounted directly in insulation.


# Junistar Square IsoSafe DimToWarm



## Product- and environment images



# Junistar Square IsoSafe DimToWarm

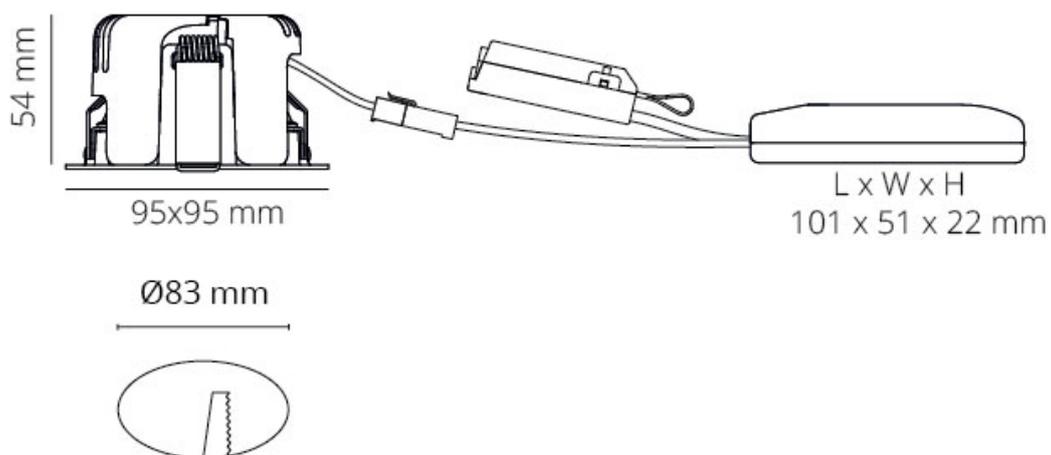

For line drawing dimensions please see each single article codes on next page

Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>901253  <b>Junistar Square IsoSafe</b>  <b>DimToWarm Black 490lm</b>  <b>2000-2800K Ra&gt;95 Trailing edge</b>  <b>8W LED</b>                      61 lm/W SDCM:3                      L90/B10&gt;50,000                      Beam: 42°, Direct, Reflector</p>	<b>Class II SELV</b> <b>IP44/IP20</b>	Trailing edge	Recessed, Indoor Screwless terminal block	L95 x W95 x H56
 <p>901263  <b>Junistar Square IsoSafe</b>  <b>DimToWarm Black 2X 980lm</b>  <b>2000-2800K Ra&gt;95 Trailing edge</b>  <b>16W LED</b>                      61 lm/W SDCM:3                      L90/B10&gt;50,000                      Beam: 42°, Direct, Reflector</p>	<b>Class II SELV</b> <b>IP44/IP20</b>	Trailing edge	Recessed, Indoor Screwless terminal block	L175 x W95 x H56
 <p>901251  <b>Junistar Square IsoSafe</b>  <b>DimToWarm White 550lm</b>  <b>2000-2800K Ra&gt;95 Trailing edge</b>  <b>8W LED</b>                      69 lm/W SDCM:3                      L90/B10&gt;50,000                      Beam: 42°, Direct, Reflector</p>	<b>Class II SELV</b> <b>IP44/IP20</b>	Trailing edge	Recessed, Indoor Screwless terminal block	L95 x W95 x H56
 <p>901261  <b>Junistar Square IsoSafe</b>  <b>DimToWarm White 2X 1100lm</b>  <b>2000-2800K Ra&gt;95 Trailing edge</b>  <b>16W LED</b>                      69 lm/W SDCM:3                      L90/B10&gt;50,000                      Beam: 42°, Direct, Reflector</p>	<b>Class II SELV</b> <b>IP44/IP20</b>	Trailing edge	Recessed, Indoor Screwless terminal block	L175 x W95 x H56
<b>Accessories</b>				
 <p>903256  <b>Black 1X Frame for Soft Square, Junistar Lux Square &amp; Junistar Square DTW</b></p>				L140 x W140 x H4
 <p>903257  <b>Black 2X Frame for Soft Square, Junistar Lux Square &amp; Junistar Square DTW</b></p>				L258 x W140 x H4
 <p>903259  <b>Black 3X Frame for Soft Square, Junistar Lux Square &amp; Junistar Square DTW</b></p>				L376 x W140 x H4

# Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 903254 <b>White 1X Frame for Soft Square, Junistar Lux Square &amp; Junistar Square DTW</b>				L140 x W140 x H4
 903255 <b>White 2X Frame for Soft Square, Junistar Lux Square &amp; Junistar Square DTW</b>				L258 x W140 x H4
 903258 <b>White 3X Frame for Soft Square, Junistar Lux Square &amp; Junistar Square DTW</b>				L376 x W140 x H4
 8246094429 <b>Emergencybox Driver DALI / EM Self test, DALI Emergency 3 hours</b>				L270 x W75 x H35
 820090 <b>Emergencybox Adapter kit for downlight</b>				L250 x W13 x H13
 8246094364 <b>Emergencybox On-Off/Trailing edge / EM Self test, Emergency 3 hours</b>				L270 x W75 x H35
 8246094500 <b>Emergencybox Driver DALI / EM DALI/Self test, Emergency 3 hours</b>				L270 x W75 x H35