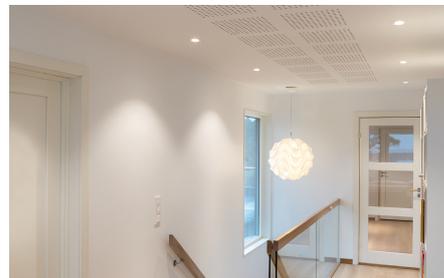# Junistar Eco IsoSafe

Junistar Eco IsoSafe is a cost-efficient downlight for indoor use with a 42° beam angle and 30° tilt function. A flexible diameter of Ø68-83mm makes Junistar Eco a great choice for refurbishing older ceilings. Junistar Eco IsoSafe is tested to be 100% airtight against plaster board ceilings. Supplied as an 8-pack incl drivers. Our IsoSafe products can be mounted directly in insulation (IsoSafe).
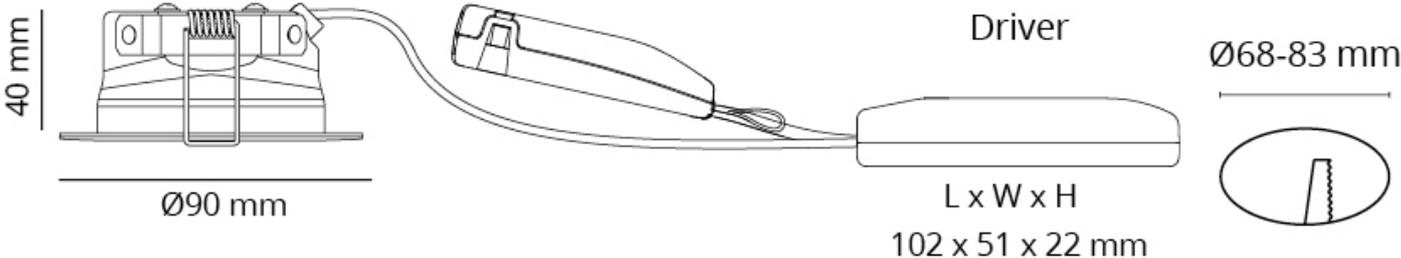
Junistar Eco IsoSafe

Product- and environment images

Junistar Eco IsoSafe

40 mm

Ø90 mm

Driver

L x W x H
102 x 51 x 22 mm

Ø68-83 mm

For line drawing dimensions please see each single article codes on next page

Article codes

Article		Protection	Control gear	Mounting/Connection	Dimensions
	905217 **Junistar ECO Isosafe Black DimToWarm 540lm 2000-2800K Ra>95 Trailing edge** **7W LED** 77 lm/W SDCM:3 L90/B10>50,000 Beam: 42°, Direct, Reflector	**Class II SELV** **IP44**	Trailing edge	Recessed, Indoor Screwless terminal block	Ø90 x H40
	905215 **Junistar ECO Isosafe White DimToWarm 550lm 2000-2800K Ra>95 Trailing edge** **7W LED** 79 lm/W SDCM:3 L90/B10>50,000 Beam: 42°, Direct, Reflector	**Class II SELV** **IP44**	Trailing edge	Recessed, Indoor Screwless terminal block	Ø90 x H40
	905216 **Junistar ECO Isosafe Black 580lm 2700K Ra>90 Trailing edge** **7W LED** 83 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector	**Class II SELV** **IP44**	Trailing edge	Recessed, Indoor Screwless terminal block	Ø90 x H40
	905213 **Junistar ECO Isosafe White 580lm 2700K Ra>90 Trailing edge** **7W LED** 83 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector	**Class II SELV** **IP44**	Trailing edge	Recessed, Indoor Screwless terminal block	Ø90 x H40
	905224 **Junistar ECO Isosafe Black 590lm 3000K Ra>90 Trailing edge** **7W LED** 84 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector	**Class II SELV** **IP44**	Trailing edge	Recessed, Indoor Screwless terminal block	Ø90 x H40
	905214 **Junistar ECO Isosafe White 600lm 3000K Ra>90 Trailing edge** **5.5W LED** 109 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector	**Class II SELV** **IP44**	Trailing edge	Recessed, Indoor Screwless terminal block	Ø90 x H40

Accessories

Article codes

Article		Protection	Control gear	Mounting/Connection	Dimensions
	820489 **Sensor Dim Box White 200VA**				L220 x W75 x H34