




The optimal downlight in the market for indoor and outdoor use. Junistar Lux IsoSafe emits a harmonious, non-flickering light with excellent colour rendering. Its patented, adjustable 30-degree tilt function in all directions is covered by a 10-year warranty. It includes a junction box that provides strain relief for several types of cables, as well as fixation for plastic tubing. Our IsoSafe products can be mounted directly in insulation.

Product- and environment images



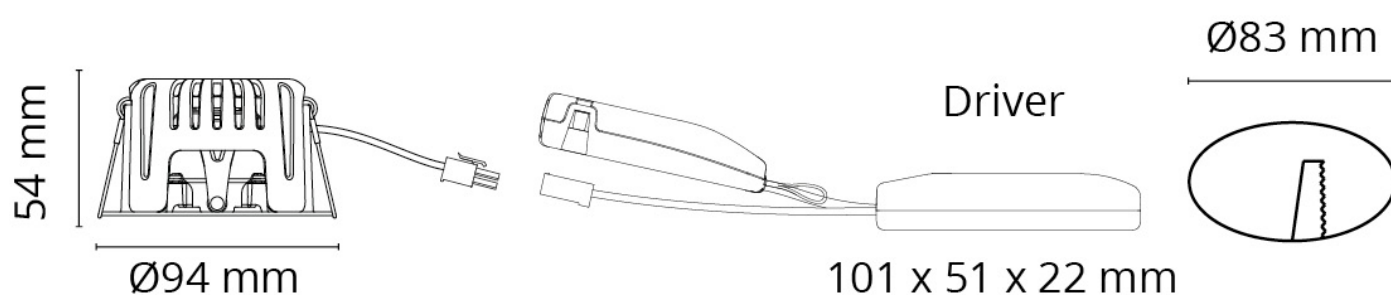

For line drawing dimensions please see each single article codes on next page

Article codes



Article		Protection	Control gear	Mounting/Connection	Dimensions
	902524 Junistar Lux IsoSafe Black 580lm 2700K Ra 98 Trailing edge 8W LED 73 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H56
	902521 Junistar Lux IsoSafe Brushed steel 580lm 2700K Ra 98 Trailing edge 8W LED 73 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor Screwless terminal block	Ø94 x H56
	902621 Junistar Lux IsoSafe Graphite 580lm 2700K Ra 98 DALI-2 7W LED 83 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP44/IP20	DALI-2	Recessed, Indoor / Outdoor 5 pol Linect / screwless terminal block	Ø94 x H56
	902527 Junistar Lux IsoSafe Graphite 580lm 2700K Ra 98 Trailing edge 8W LED 73 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H56
	902518 Junistar Lux IsoSafe White 580lm 2700K Ra 98 Trailing edge 8W LED 73 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H56
	902525 Junistar Lux IsoSafe Black 590lm 3000K Ra 98 Trailing edge 8W LED 74 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H56

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 902522 Junistar Lux IsoSafe Brushed steel 590lm 3000K Ra 98 Trailing edge 8W LED 74 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor Screwless terminal block	Ø94 x H56
 902528 Junistar Lux IsoSafe Graphite 590lm 3000K Ra 98 Trailing edge 8W LED 74 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H56
 902519 Junistar Lux IsoSafe White 590lm 3000K Ra 98 Trailing edge 8W LED 74 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H56
 902526 Junistar Lux IsoSafe Black 620lm 4000K Ra 98 Trailing edge 8W LED 78 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H56
 902523 Junistar Lux IsoSafe Brushed steel 620lm 4000K Ra 98 Trailing edge 8W LED 78 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor Screwless terminal block	Ø94 x H56
 902529 Junistar Lux IsoSafe Graphite 620lm 4000K Ra 98 Trailing edge 8W LED 78 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H56



Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 902520 Junistar Lux IsoSafe White 620lm 4000K Ra 98 Trailing edge 8W LED 78 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H56
Accessories				
 9143 Rehab Ring Black 133mm for Junistar, Uniled, Soft & Jupiter				Ø133 x L133 x W133 x H4
 9236 Rehab Ring Black 180mm for Junistar, Uniled, Soft & Jupiter				Ø180 x H45
 9973 Rehab Ring Brushed steel 133mm for Junistar, Uniled, Soft & Jupiter				Ø133 x H4
 9233 Rehab Ring Graphite 133mm for Junistar, Uniled, Soft & Jupiter				Ø133 x L133 x W133 x H4
 9234 Rehab Ring Graphite 180mm for Junistar, Uniled, Soft & Jupiter				Ø180 x H45
 9327 Rehab Ring Graphite 250mm for Junistar, Uniled, Soft & Jupiter				Ø250 x H45
 9223 Rehab Ring White 133mm for Junistar, Uniled, Soft & Jupiter				Ø133 x L133 x W133 x H4
 9224 Rehab Ring White 180mm for Junistar, Uniled, Soft & Jupiter				Ø180 x H45
 9227 Rehab Ring White 250mm for Junistar, Uniled, Soft & Jupiter				Ø250 x H45
 820489 Sensor Dim Box White 200VA				L220 x W75 x H34

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 8246094429 Emergencybox Driver DALI / EM Self test, DALI Emergency 3 hours				L270 x W75 x H35
 820090 Emergencybox Adapter kit for downlight				L250 x W13 x H13
 8246094364 Emergencybox On-Off/Trailing edge / EM Self test, Emergency 3 hours				L270 x W75 x H35
 8246094500 Emergencybox Driver DALI / EM DALI/Self test, Emergency 3 hours				L270 x W75 x H35