

# Junistar Square /x2



Attractive downlight for indoor use with 30-degree 360-degree stepless tilt. Well integrated LED chip and dimmable Phase cut-off. Made of die-cast powder-coated aluminium or brushed steel, glass diffuser. 42-degree scattering angle via reflector. Low recessed downlight with hole size Ø83mm. Tool-free mounting in mounting box for direct 230 V with loopable quick clips and automatic strain relief. IP44, KL III with dedicated circuit.


# Junistar Square /x2



## Product- and environment images



# Junistar Square /x2

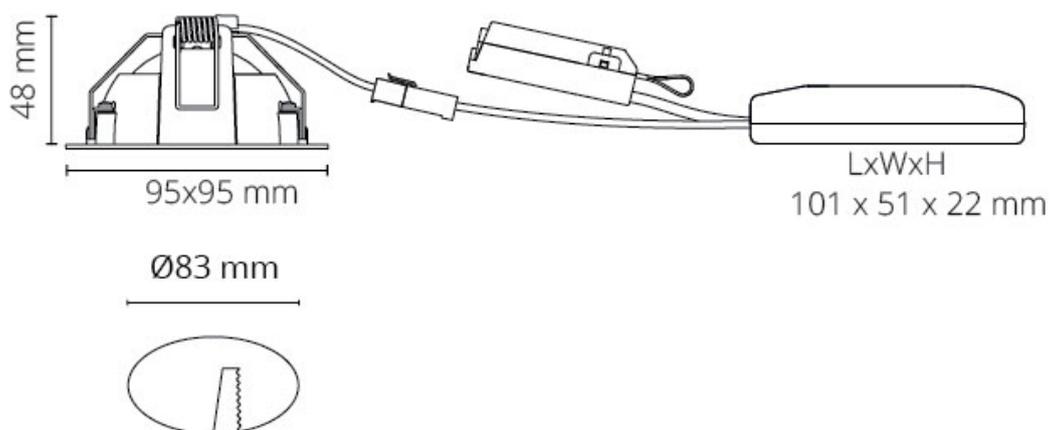

For line drawing dimensions please see each single article codes on next page

Article		Protection	Control gear	Mounting/Connection	Dimensions
	902322 <b>Junistar Square Brushed steel</b> <b>625lm 3000K Ra&gt;95 Trailing edge</b> <b>7.3W LED</b> 86 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector	<b>Class II SELV</b> <b>IP44</b>	Trailing edge	Recessed, Indoor Screwless terminal block	L95 x W95 x H50
<b>Accessories</b>					
	820489 <b>Sensor Dim Box White 200VA</b>				L220 x W75 x H34
	8246094429 <b>Emergencybox Driver DALI / EM Self test, DALI Emergency 3 hours</b>				L270 x W75 x H35
	820090 <b>Emergencybox Adapter kit for downlight</b>				L250 x W13 x H13
	8246094364 <b>Emergencybox On-Off/Trailing edge / EM Self test, Emergency 3 hours</b>				L270 x W75 x H35
	8246094500 <b>Emergencybox Driver DALI / EM DALI/Self test, Emergency 3 hours</b>				L270 x W75 x H35