


LEDstar Slim



Compact downlight with build height of just 11mm. Provides great light under or inside cabinets and other applications with limited space. LEDstar Slim uses energy efficient LEDs and delivers 240lm with 105 degree diffusion. 3 meter cable included. Can also be surface mounted with the spacer ring sold separately.

LEDstar Slim

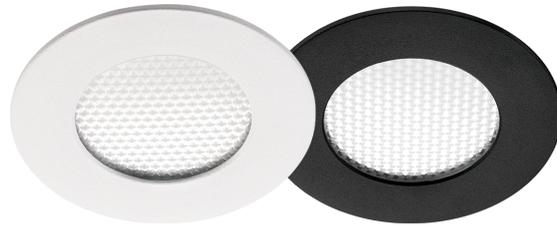

Product- and environment images



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>912142 LEDstar Slim Black 230lm 2700K Ra>90 5W LED 46 lm/W SDCM:3 L80/B20>50,000 Beam: 105°, Direct, Plastic clear</p>	Class III IP65		Recessed, Indoor Cable 3m	Ø65 x H13
 <p>912140 LEDstar Slim White 250lm 2700K Ra>90 3.2W LED 78 lm/W SDCM:3 L80/B20>50,000 Beam: 105°, Direct, Plastic clear</p>	Class III IP65		Recessed, Indoor Cable 3m	Ø65 x H13
 <p>912143 LEDstar Slim Black 250lm 3000K Ra>90 3.2W LED 78 lm/W SDCM:3 L80/B20>50,000 Beam: 105°, Direct, Plastic clear</p>	Class III IP65		Recessed, Indoor Cable 3m	Ø65 x H13
 <p>912141 LEDstar Slim White 240lm 3000K Ra>90 5W LED 48 lm/W SDCM:3 L80/B20>50,000 Beam: 105°, Direct, Plastic clear</p>	Class III IP65		Recessed, Indoor Cable 3m	Ø65 x H13
Drivers				
 <p>820444 IP65 Junction box Black Incl driver 90W Trailing edge</p>				L346 x W127 x H53
 <p>820576 SG White Driver 24V 150W DALI-2 / Push Dim 150W 50,000</p>	Class II IP20	DALI-2 / Push Dim	Indoor	L240 x W59 x H40
 <p>820186 SG White Driver 24V 20W 24V Trailing edge</p>				L250 x W70 x H28

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 820440 SG White Driver 24V 36W Trailing edge				L200 x W85 x H35
 820441 SG White Driver 24V 75W Trailing edge				L200 x W85 x H35
 820442 SG White Driver 24V 150W Trailing edge				L310 x W85 x H35
Accessories				
 912145 LEDstar Slim Black Surface Ring				Ø65 x H15
 912144 LEDstar Slim White Surface Ring				Ø65 x H15