

Rax Soft 200




Rax Soft 200 is a high-performance downlight for lighting in public buildings, offices, corridors etc with an excellent light control by a combination of optimized lens and reflector optics. Available with satin matt reflector for high efficiency. Rax Soft 200 is installed easily with springs that fit ceiling panels with a thickness of 1–50 mm.

Rax Soft 200



Product- and environment images

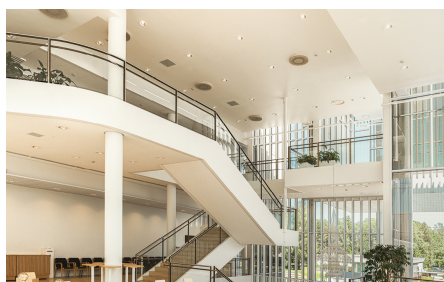

Article codes



Article		Protection	Control gear	Mounting/Connection	Dimensions
	212515 Rax Soft 200 Satin 1600 3000K Ra>80 DALI-2 / Push Dim 13W LED 123 lm/W SDCM:2 L90/B10>100,000 Beam: 62°, Direct, Satin Matt Reflector	Class II SELV IP54/IP20 IK08	DALI-2 / Push Dim	Recessed, Indoor Cable 5x0,75mm ² 5 pol Linect / screwless terminal block	Ø216 x H93
	212519 Rax Soft 200 Satin 2200 3000K Ra>80 DALI-2 / Push Dim 18W LED 119 lm/W SDCM:2 L90/B10>100,000 Beam: 62°, Direct, Satin Matt Reflector	Class II SELV IP54/IP20 IK08	DALI-2 / Push Dim	Recessed, Indoor Cable 5x0,75mm ² 5 pol Linect / screwless terminal block	Ø216 x H93
	212521 Rax Soft 200 Satin 2200 3000K Ra>90 DALI-2 / Push Dim 22W LED 98 lm/W SDCM:2 L90/B10>100,000 Beam: 62°, Direct, Satin Matt Reflector	Class II SELV IP54/IP20 IK08	DALI-2 / Push Dim	Recessed, Indoor Cable 5x0,75mm ² 5 pol Linect / screwless terminal block	Ø216 x H93
	212525 Rax Soft 200 Satin 3000 3000K Ra>80 DALI-2 / Push Dim 26W LED 114 lm/W SDCM:2 L90/B10>100,000 Beam: 62°, Direct, Satin Matt Reflector	Class II SELV IP54/IP20 IK08	DALI-2 / Push Dim	Recessed, Indoor Cable 5x0,75mm ² 5 pol Linect / screwless terminal block	Ø216 x H93
	212529 Rax Soft 200 Satin 4500 3000K Ra>80 DALI-2 / Push Dim 40W LED 107 lm/W SDCM:2 L90/B10>100,000 Beam: 62°, Direct, Satin Matt Reflector	Class II SELV IP54/IP20 IK08	DALI-2 / Push Dim	Recessed, Indoor Cable 5x0,75mm ² 5 pol Linect / screwless terminal block	Ø216 x H93
	212514 Rax Soft 200 Satin 1600 3000K Ra>80 Trailing edge 13W LED 123 lm/W SDCM:2	Class II SELV IP54/IP20 IK08	Trailing edge	Recessed, Indoor 3 pol Linect / screwless terminal block	Ø216 x H93

Article codes



Article		Protection	Control gear	Mounting/Connection	Dimensions
	L90/B10>100,000				
	Beam: 62°, Direct, Satin Matt Reflector	Class II SELV	Trailing edge	Recessed, Indoor	Ø216 x H93
	Rax Soft 200 Satin 2200 3000K	IP54/IP20		3 pol Linect / screwless terminal	
	Ra>80 Trailing edge	IK08		block	
	18W LED				
	119 lm/W SDCM:2				
	L90/B10>100,000				
	Beam: 62°, Direct, Satin Matt Reflector				
	212520	Class II SELV	Trailing edge	Recessed, Indoor	Ø216 x H93
	Rax Soft 200 Satin 2200 3000K	IP54/IP20		3 pol Linect / screwless terminal	
	Ra>90 Trailing edge	IK08		block	
	22W LED				
	98 lm/W SDCM:2				
	L90/B10>100,000				
	Beam: 62°, Direct, Satin Matt Reflector				
	212524	Class II SELV	Trailing edge	Recessed, Indoor	Ø216 x H93
	Rax Soft 200 Satin 3000 3000K	IP54/IP20		3 pol Linect / screwless terminal	
	Ra>80 Trailing edge	IK08		block	
	26W LED				
	114 lm/W SDCM:2				
	L90/B10>100,000				
	Beam: 62°, Direct, Satin Matt Reflector				
	212528	Class II SELV	Trailing edge	Recessed, Indoor	Ø216 x H93
	Rax Soft 200 Satin 4500 3000K	IP54/IP20		3 pol Linect / screwless terminal	
	Ra>80 Trailing edge	IK08		block	
	40W LED				
	107 lm/W SDCM:2				
	L90/B10>100,000				
	Beam: 62°, Direct, Satin Matt Reflector				
	212517	Class II SELV	DALI-2 / Push Dim	Recessed, Indoor	Ø216 x H93
	Rax Soft 200 Satin 1600 4000K	IP54/IP20		Cable 5x0,75mm²	
	Ra>80 DALI-2 / Push Dim	IK08		5 pol Linect / screwless terminal	
	13W LED			block	
	127 lm/W SDCM:2				
	L90/B10>100,000				
	Beam: 62°, Direct, Satin Matt Reflector				
	212523	Class II SELV	DALI-2 / Push Dim	Recessed, Indoor	Ø216 x H93
	Rax Soft 200 Satin 2200 4000K	IP54/IP20		Cable 5x0,75mm²	
	Ra>80 DALI-2 / Push Dim	IK08		5 pol Linect / screwless terminal	
	18W LED			block	
	123 lm/W SDCM:2				

Article codes



Article	L90/B10>100,000	Protection	Control gear	Mounting/Connection	Dimensions
	Beam: 62°, Direct, Satin Matt Reflector 212527 Rax Soft 200 Satin 3000 4000K Ra>80 DALI-2 / Push Dim 26W LED 118 lm/W SDCM:2 L90/B10>100,000 Beam: 62°, Direct, Satin Matt Reflector	Class II SELV IP54/IP20 IK08	DALI-2 / Push Dim	Recessed, Indoor Cable 5x0,75mm ² 5 pol Linect / screwless terminal block	Ø216 x H93
		Class II SELV IP54/IP20 IK08	DALI-2 / Push Dim	Recessed, Indoor Cable 5x0,75mm ² 5 pol Linect / screwless terminal block	Ø216 x H93
	212573 Rax Soft 200 Satin 2200 4000K Ra>90 DALI-2 / Push Dim 22W LED 105 lm/W SDCM:2 L90/B10>100,000 Beam: 62°, Direct, Satin Matt Reflector	Class II SELV IP54/IP20 IK08	DALI-2 / Push Dim	Recessed, Indoor Cable 5x0,75mm ² 5 pol Linect / screwless terminal block	Ø216 x H93
		Class II SELV IP54/IP20 IK08	Trailing edge	Recessed, Indoor 3 pol Linect / screwless terminal block	Ø216 x H93
	212522 Rax Soft 200 Satin 2200 4000K Ra>80 Trailing edge 18W LED 123 lm/W SDCM:2 L90/B10>100,000 Beam: 62°, Direct, Satin Matt Reflector	Class II SELV IP54/IP20 IK08	Trailing edge	Recessed, Indoor 3 pol Linect / screwless terminal block	Ø216 x H93
		Class II SELV IP54/IP20 IK08	Trailing edge	Recessed, Indoor 3 pol Linect / screwless terminal block	Ø216 x H93





Article codes



Article	L90/B10>100,000	Protection	Control gear	Mounting/Connection	Dimensions
	Beam: 62°, Direct, Satin Matt Reflector 212550 Rax Soft 200 Satin 4500 4000K Ra>80 Trailing edge 40W LED 110 lm/W SDCM:2 L90/B10>100,000 Beam: 62°, Direct, Satin Matt Reflector	Class II SELV IP54/IP20 IK08	Trailing edge	Recessed, Indoor 3 pol Linect / screwless terminal block	Ø216 x H93
		Class II SELV IP54/IP20 IK08	Trailing edge	Recessed, Indoor 3 pol Linect / screwless terminal block	Ø216 x H93
Accessories					
	212618 Rax 200 Black Rehabring Ø205-250mm				Ø270 x H16
	212619 Rax 200 Black Rehabring Ø210-280mm				Ø300 x H16
	212625 Rax 200 Black Glass clear IP44				Ø218 x H12
	212627 Rax 200 Black Glass frosted IP44				Ø220 x H12
	212624 Rax 200 White Glass clear IP44				Ø218 x H12
	212626 Rax 200 White Glass frosted IP44				Ø218 x H12
	212628 Rax 200 White Rehabring Ø210-280mm				Ø300 x H16

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
	820489			L220 x W75 x H34
	Sensor Dim Box White 200VA			
	8249044696			Ø270 x H16
	Rax 200 White Rehabring Ø205-250mm			
	8246094429			L270 x W75 x H35
	Emergencybox Driver DALI / EM Self test, DALI Emergency 3 hours			
	900109			L400 x W400 x H1
	Reliefplate Weight distribution panel			
	8246094364			L270 x W75 x H35
	Emergencybox On-Off/Trailing edge / EM Self test, Emergency 3 hours			
	8246094500			L270 x W75 x H35
	Emergencybox Driver DALI / EM DALI/Self test, Emergency 3 hours			
	8249038725			L585 x W260 x H15
	Rax 200 Mounting plate			