


# Sense Round TW




Sense luminaire used as replacement or alternative for a normal downlight. Very low profile and quick connection between luminaire and driver as well as tool-free connection in junction box with loop for easy and quick installation. High efficiency up to 105 lm/W and low glare rating makes Sense the obvious choice in many applications. Tunable White 2700-6500K LED Dim or DALI Type 8.

# Sense Round TW

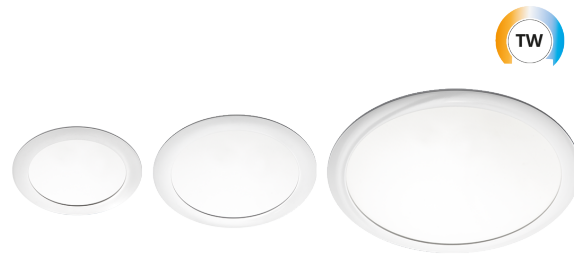



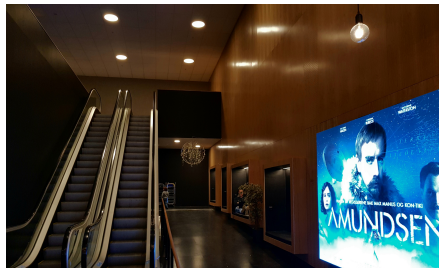







## Product- and environment images








# Article codes



Article		Protection	Control gear	Mounting/Connection	Dimensions
	 212302 <b>Sense TW White 255 IsoSafe</b> <b>1270lm 2700-6500K Ra&gt;80 TW DALI</b> <b>Type 8</b> <b>15W LED</b> 85 lm/W SDCM:3 L80/B20>50,000, L90>50,000 Direct, Opal	<b>Class II SELV</b> <b>IP40/IP20</b> <b>IK08</b>	TW DALI Type 8	Recessed, Indoor	Ø255
	 212304 <b>Sense TW White 320 IsoSafe</b> <b>1610lm 2700-6500K Ra&gt;80 TW DALI</b> <b>Type 8</b> <b>19W LED</b> 85 lm/W SDCM:3 L80/B20>100.000 (50.000 as IsoSafe), L90>50,000 Direct, Opal	<b>Class II SELV</b> <b>IP40/IP20</b> <b>IK08</b>	TW DALI Type 8	Recessed, Indoor	Ø320
	 212306 <b>Sense TW White 495 3290lm</b> <b>2700-6500K Ra&gt;80 TW DALI Type 8</b> <b>36W LED</b> 91 lm/W SDCM:3 L80/B20>50,000, L90>50,000 Direct, Opal	<b>Class II SELV</b> <b>IP40/IP20</b> <b>IK08</b>	TW DALI Type 8	Recessed, Indoor	Ø495 x H29
	 212301 <b>Sense TW White 255 IsoSafe</b> <b>1270lm 2700-6500K Ra&gt;80 TW</b> <b>LEDDim</b> <b>15W LED</b> 85 lm/W SDCM:3 L80/B20>100.000 (50.000 as IsoSafe), L90>50,000 Direct, Opal	<b>Class II SELV</b> <b>IP40/IP20</b> <b>IK08</b>	TW LEDDim	Recessed, Indoor	Ø255
	 212303 <b>Sense TW White 320 IsoSafe</b> <b>1830lm 2700-6500K Ra&gt;80 TW</b> <b>LEDDim</b> <b>19W LED</b> 96 lm/W SDCM:3 L80/B20>50,000, L90>50,000 Direct, Opal	<b>Class II SELV</b> <b>IP40/IP20</b> <b>IK08</b>	TW LEDDim	Recessed, Indoor	Ø320

# Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 212305 <b>Sense TW White 495 3770lm</b> <b>(@6500K) 2700-6500K Ra&gt;80 TW</b> <b>LEDDim</b> <b>36W LED</b> 105 lm/W SDCM:3 L80/B20>50,000, L90>50,000 Direct, Opal	<b>Class II SELV</b> <b>IP40/IP20</b> <b>IK08</b>	TW LEDDim	Recessed, Indoor	Ø495 x H29
<b>Accessories</b>				
 8246094429 <b>Emergencybox Driver DALI / EM Self test, DALI Emergency 3H</b>	L270 x W75 x H35			
 900109 <b>Reliefplate Weight distribution panel</b>	L400 x W400 x H1			
 8246094364 <b>Emergencybox On-Off/Trailing edge / EM Self test, Emergency 3 hours</b>	L270 x W75 x H35			
 8246094500 <b>Emergencybox Driver DALI / EM DALI/Self test, Emergency 3 hours</b>	L270 x W75 x H35			