



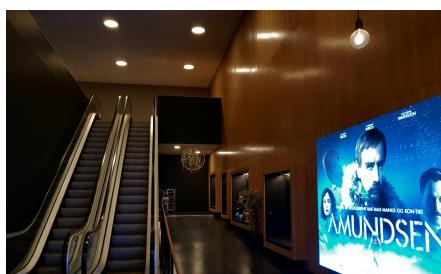

Sense luminaire used as replacement or alternative for a normal downlight. Very low profile and quick connection between luminaire and driver as well as tool-free connection in junction box with loop for easy and quick installation. High efficiency up to 105 lm/W and low glare rating makes Sense the obvious choice in many applications. Tunable White 2700-6500K LEDDim or DALI Type 8.

Product- and environment images

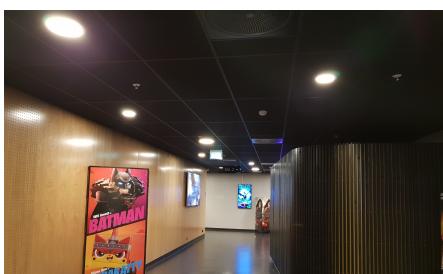

Article codes



Article		Protection	Control gear	Mounting/Connection	Dimensions
	212302 Sense TW White 255 IsoSafe 1270lm 2700-6500K Ra>80 TW DALI	Class II SELV IP40/IP20 IK08	TW DALI Type 8	Recessed, Indoor 5 pol Linec / screwless terminal block	Ø255
	Type 8 15W LED 85 lm/W SDCM:3 L80/B20>50,000, L90>50,000 Direct, Opal				
	212304 Sense TW White 320 IsoSafe 1610lm 2700-6500K Ra>80 TW DALI	Class II SELV IP40/IP20 IK08	TW DALI Type 8	Recessed, Indoor 5 pol Linec / screwless terminal block	Ø320
	Type 8 19W LED 85 lm/W SDCM:3 L80/B20>100.000 (50.000 as IsoSafe), L90>50,000 Direct, Opal				
	212306 Sense TW White 495 3290lm 2700-6500K Ra>80 TW DALI Type 8	Class II SELV IP40/IP20 IK08	TW DALI Type 8	Recessed, Indoor 5 pol Linec / screwless terminal block	Ø495 x H29
	36W LED 91 lm/W SDCM:3 L80/B20>50,000, L90>50,000 Direct, Opal				
	212301 Sense TW White 255 IsoSafe 1270lm 2700-6500K Ra>80 TW LEDDim	Class II SELV IP40/IP20 IK08	TW LEDDim	Recessed, Indoor Screwless terminal block	Ø255
	LEDDim 15W LED 85 lm/W SDCM:3 L80/B20>100.000 (50.000 as IsoSafe), L90>50,000 Direct, Opal				
	212303 Sense TW White 320 IsoSafe 1830lm 2700-6500K Ra>80 TW LEDDim	Class II SELV IP40/IP20 IK08	TW LEDDim	Recessed, Indoor Screwless terminal block	Ø320
	19W LED 96 lm/W SDCM:3 L80/B20>50,000, L90>50,000 Direct, Opal				

Article codes



Article		Protection	Control gear	Mounting/Connection	Dimensions
	212305 Sense TW White 495 3770lm (@6500K) 2700-6500K Ra>80 TW LEDDim 36W LED 105 lm/W SDCM:3 L80/B20>50,000, L90>50,000 Direct, Opal	Class II SELV IP40/IP20 IK08	TW LEDDim	Recessed, Indoor 3 pol Linect / screwless terminal block	Ø495 x H29
Accessories					
	8246094429 Emergencybox Driver DALI / EM Self test, DALI Emergency 3 hours				L270 x W75 x H35
	900109 Reliefplate Weight distribution panel				L400 x W400 x H1
	8246094364 Emergencybox On-Off/Trailing edge / EM Self test, Emergency 3 hours				L270 x W75 x H35
	8246094500 Emergencybox Driver DALI / EM DALI/Self test, Emergency 3 hours				L270 x W75 x H35